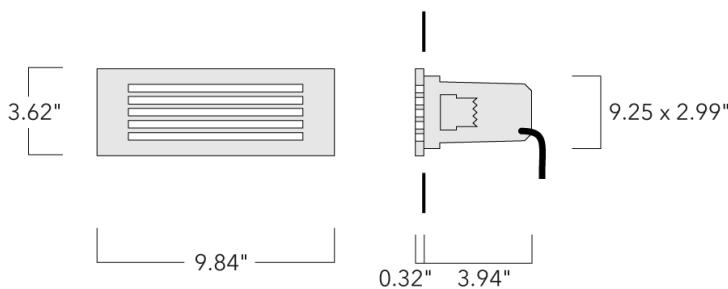


**Recessed Wall Luminaires****Description**

Vandal-resistant, grated steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

**Recessed Wall Luminaires****Specifications****Material description**

---

Body	Luminaire body constructed in die cast aluminum.
Lens	Opal polycarbonate lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

---

**Additional information**

---

Lifetime	Ta=25°/40° L80B10 > 54000h
Listings	ETL listed. Suitable for wet locations.

---

**Recessed Wall Luminaires****Options****Light distribution****Color temperature****Nominal Watt**

diffused distribution



3000 K

1 W




4000 K



2700 K

**Recessed Wall Luminaires****Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
diffused distribution  +	133-0345	LED-6/6W / 350 mA - 3000 K	94.9	7.5 W	80	2.65
	133-0346	LED-6/6W / 350 mA - 4000 K	104.1	7.5 W	80	2.65
	133-0452	LED-6/6W / 350 mA - 2700 K	88.8	7.5 W	80	2.90

**Recessed Wall Luminaires****Mounting Accessories****Installation breakout**

Description	Part ID	A	B	C1	C
Installation breakout BST25-I	133-0076	10.51"	5.19"	5.12"	130

