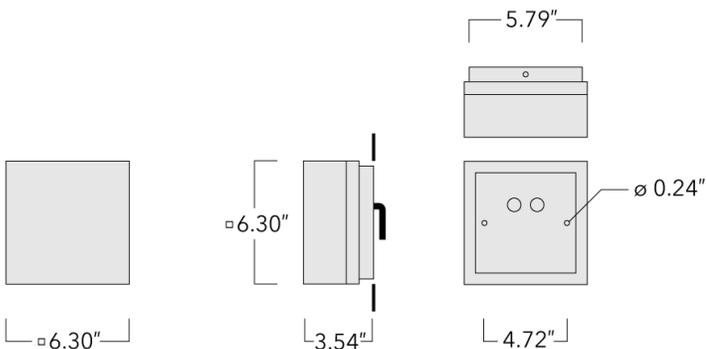


**Description**

IP66, Class I, IK07. Surface mounted LED wall luminaire. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming on request. Suitable for installation over 4" recessed junction box. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

ADA (American Disabilities Act) Compliant.



Surface Mounted Wall Luminaires

Specifications**Material description**

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG [®] Controlled Compression Gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

Options

Light distribution



symmetric, medium beam [M]



symmetric, medium beam up and down [M/M]



asymmetric, side throw beam [S]



symmetric, medium beam up and side throw down [M/S]



symmetric, narrow beam up and side-throw down [N/S]



symmetric, narrow beam [N]



symmetric, narrow beam up and down [N/N]



rectangular asymmetric Type II [R45]



medium beam up and forward throw down [M/R45]



symmetric narrow beam up and forward throw down [E/R45]



symmetric, narrow beam up and medium beam down [N/M]



rectangular, side throw [R45/R45]

Color temperature

Nominal Watt



3000 K

8 W

18 W



4000 K

1 W




0 W



2700 K

Surface Mounted Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
asymmetric, side throw beam [S] 	131-7000	LED-3/6W / 700 mA - 2700 K	515.6	7.5 W	80	4.20
	131-7003	LED-3/9W / 1050 mA - 2700 K	783	11 W	80	4.20
	131-7006	LED-3/13W / 1400 mA - 2700 K	993.1	14 W	80	4.20
	131-9400	LED-3/6W / 700 mA - 3000 K	553.8	7.5 W	80	4.20
	131-9403	LED-3/6W / 700 mA - 4000 K	592	7.5 W	80	4.20
medium beam up and forward throw down [M/R45] 	131-9019	LED-2x3/12W / 700 mA - 2700 K	1097.5	15 W	80	4.20
	131-9022	LED-2x3/18W / 1050 mA - 2700 K	1666.6	22 W	80	4.2
	131-9028	LED-2x3/26W / 1400 mA - 2700 K	2113.8	27 W	80	4.20
	131-9423	LED-2x3/12W / 700 mA - 3000K	1178.8	15 W	80	4.20
	131-9425	LED-2x3/12W / 700 mA - 4000K	1260.1	15 W	80	4.20
	131-9722	LED-2x3/18W / 1050mA - 3000 K	1747.9	22 W	80	4.20
	131-9727	LED-2x3/18W / 1050mA - 4000 K	1829.2	22 W	80	4.20
	131-9732	LED-2x3/26W / 1400mA - 3000 K	2235.7	27 W	80	4.20
	131-9737	LED-2x3/26W / 1400mA - 4000 K	2337.3	27 W	80	4.20
rectangular asymmetric Type II [R45] 	131-0178	LED-3/9W / 1050mA - 3000 K	878.1	11 W	80	4.20
	131-0179	LED-3/9W / 1050mA - 4000 K	918.9	11 W	80	4.20
	131-0184	LED-3/13W / 1400 mA - 3000 K	1123.1	14 W	80	4.20
	131-0185	LED-3/13W / 1400 mA - 4000 K	1174.2	14 W	80	4.20
	131-9004	LED-3/6W / 700 mA - 2700 K	551.4	7.5 W	80	4.2
	131-9007	LED-3/9W / 1050 mA - 2700 K	837.3	11 W	80	4.2
	131-9012	LED-3/13W / 1400 mA - 2700 K	1061.9	14 W	80	4.20
	131-9422	LED-3/6W / 700 mA - 3000 K	592.2	7.5 W	80	4.20
	131-9424	LED-3/6W / 700 mA - 4000 K	633	7.5 W	80	4.20
	rectangular, side throw [R45/R45] 	131-9021	LED-2x3/12W / 700 mA - 2700 K	2205.5	15 W	80
131-9027		LED-2x3/18W / 1050 mA - 2700 K	3349.1	22 W	80	4.20
131-9035		LED-2x3/26W / 1400 mA - 2700 K	4247.7	27 W	80	4.20
symmetric narrow beam up and forward throw down [E/R45]	131-9020	LED-2x3/12W / 700 mA - 2700 K	1163.2	15 W	80	4.20
	131-9023	LED-2x3/18W / 1050 mA - 2700 K	1766.3	22 W	80	4.2
	131-9029	LED-2x3/26W / 1400 mA - 2700 K	2240.2	27 W	80	4.20
	131-9462	LED-2x3/12W / 700 mA - 3000K	1249.4	15 W	80	4.20




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/05/2026

Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	131-9463	LED-2x3/12W / 700 mA - 4000K	1335.5	15 W	80	4.20
	131-9723	LED-2x3/18W / 1050mA - 3000 K	1852.5	22 W	80	4.23
	131-9728	LED-2x3/18W / 1050mA - 4000 K	1938.7	22 W	80	4.20
	131-9733	LED-2x3/26W / 1400mA - 3000 K	2369.5	27 W	80	4.20
	131-9738	LED-2x3/26W / 1400mA - 4000 K	2477.2	27 W	80	4.20
symmetric, medium beam [M] 	131-0174	LED-3/9W / 1050mA - 3000 K	869.6	11 W	80	4.20
	131-0175	LED-3/9W / 1050mA - 4000 K	910	11 W	80	4.20
	131-0180	LED-3/13W / 1400 mA - 3000 K	1112.2	14 W	80	4.20
	131-0181	LED-3/13W / 1400 mA - 4000 K	1162.8	14 W	80	4.20
	131-9002	LED-3/6W / 700 mA - 2700 K	546	7.5 W	80	4.2
	131-9008	LED-3/9W / 1050 mA - 2700 K	829.1	11 W	80	4.2
	131-9013	LED-3/13W / 1400 mA - 2700 K	1051.6	14 W	80	4.2
	131-9401	LED-3/6W / 700 mA - 3000 K	586.5	7.5 W	80	4.20
	131-9404	LED-3/6W / 700 mA - 4000 K	626.9	7.5 W	80	4.20
symmetric, medium beam up and down [M/M] 	131-9015	LED-2x3/12W / 700 mA - 2700 K	1092.2	15 W	80	4.20
	131-9024	LED-2x3/18W / 1050 mA - 2700 K	1658.5	22 W	80	4.2
	131-9032	LED-2x3/26W / 1400 mA - 2700 K	2103.5	27 W	80	4.20
	131-9409	LED-2x3/12W / 700 mA - 3000K	1173.1	15 W	80	4.20
	131-9414	LED-2x3/12W / 700 mA - 4000K	1254	15 W	80	4.20
	131-9724	LED-2x3/18W / 1050mA - 3000 K	1739.5	22 W	80	4.23
	131-9729	LED-2x3/18W / 1050mA - 4000 K	1820.4	22 W	80	4.20
	131-9734	LED-2x3/26W / 1400mA - 3000 K	2224.9	27 W	80	4.20
	131-9739	LED-2x3/26W / 1400mA - 4000 K	2326	27 W	80	4.20
	symmetric, medium beam up and side throw down [M/S] 	131-7009	LED-2x3/12W / 700 mA - 2700 K	1061.7	15 W	80
131-7012		LED-2x3/18W / 1050 mA - 2700 K	1612.2	22 W	80	4.20
131-7015		LED-2x3/26W / 1400 mA - 2700 K	2044.7	27 W	80	4.20
131-9407		LED-2x3/12W / 700 mA - 3000K	1140.3	15 W	80	4.20
131-9412		LED-2x3/12W / 700 mA - 4000K	1218.9	15 W	80	4.20
symmetric, narrow beam [N] 	131-0176	LED-3/9W / 1050mA - 3000 K	974	11 W	80	4.20
	131-0177	LED-3/9W / 1050mA - 4000 K	1019.3	11 W	80	4.20
	131-0182	LED-3/13W / 1400 mA - 3000 K	1245.8	14 W	80	4.20
	131-0183	LED-3/13W / 1400 mA - 4000 K	1302.5	14 W	80	4.20
	131-9003	LED-3/6W / 700 mA - 2700 K	611.6	7.5 W	80	4.2




WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/05/2026

Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	131-9009	LED-3/9W / 1050 mA - 2700 K	928.7	11 W	80	4.2
	131-9014	LED-3/13W / 1400 mA - 2700 K	1177.9	14 W	80	4.20
	131-9420	LED-3/6W / 700 mA - 3000 K	656.9	7.5 W	80	4.20
	131-9421	LED-3/6W / 700 mA - 4000 K	702.2	7.5 W	80	4.20
symmetric, narrow beam up and down [N/N] 	131-9018	LED-2x3/12W / 700 mA - 2700 K	1223.6	15 W	80	4.20
	131-9026	LED-2x3/18W / 1050 mA - 2700 K	1858	22 W	80	4.2
	131-9034	LED-2x3/26W / 1400 mA - 2700 K	2356.5	27 W	80	4.20
	131-9416	LED-2x3/12W / 700 mA - 3000K	1314.2	15 W	80	4.20
	131-9417	LED-2x3/12W / 700 mA - 4000K	1404.8	15 W	80	4.20
	131-9726	LED-2x3/18W / 1050mA - 3000 K	1948.6	22 W	80	4.23
	131-9731	LED-2x3/18W / 1050mA - 4000 K	2039.3	22 W	80	4.20
	131-9736	LED-2x3/26W / 1400mA - 3000 K	2492.4	27 W	80	4.20
	131-9741	LED-2x3/26W / 1400mA - 4000 K	2605.7	27 W	80	4.20
	symmetric, narrow beam up and medium beam down [N/M] 	131-9016	LED-2x3/12W / 700 mA - 2700 K	1157.9	15 W	80
131-9025		LED-2x3/18W / 1050 mA - 2700 K	1758.3	22 W	80	4.20
131-9725		LED-2x3/18W / 1050mA - 3000 K	1844	22 W	80	4.23
131-9730		LED-2x3/18W / 1050mA - 4000 K	1929.8	22 W	80	4.20
131-9735		LED-2x3/26W / 1400mA - 3000 K	2358.7	27 W	80	4.20
131-9740		LED-2x3/26W / 1400mA - 4000 K	2465.9	27 W	80	4.20
symmetric, narrow beam up and side-throw down [N/S] 	131-7018	LED-2x3/12W / 700 mA - 2700 K	1127.3	15 W	80	4.20
	131-7021	LED-2x3/18W / 1050 mA - 2700 K	1711.9	22 W	80	4.20
	131-7024	LED-2x3/26W / 1400 mA - 2700 K	2171.1	27 W	80	4.20
	131-9408	LED-2x3/12W / 700 mA - 3000K	1210.8	15 W	80	4.20
	131-9413	LED-2x3/12W / 700 mA - 4000K	1294.3	15 W	80	4.20

Mounting Accessories**Surface Collar**

Description	Part ID	A	B	C1	D1	D2	D3	M1	M2
QLS410 Surface Collar	131-6000	6.3	6.3	1.75	ø1	ø2	ø0.38	5	5