

Surface Mounted Wall Luminaires



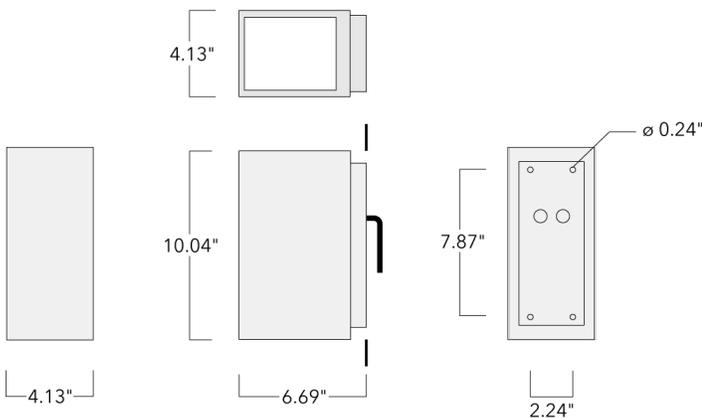
Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)



Surface Mounted Wall Luminaires

Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> RAL9004 Black </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> RAL9007 Grey Metallic </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></div> RAL9016 White </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: #654321; margin-right: 5px;"></div> RAL8019 Dark Bronze </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

Options

Light distribution



symmetric, medium beam [M]



symmetric, narrow beam [N]



asymmetric, forward throw [A60]



symmetric, narrow beam up and forward-throw down [N/A60]



symmetric, medium beam up and down [M/M]



symmetric, narrow beam up and medium beam down [N/M]



symmetric, narrow beam up and down [N/N]



symmetric, medium beam up and forward throw down [M/A60]

Color temperature

Nominal Watt



3000 K



4000 K





2700 K

0 W

Surface Mounted Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
asymmetric, forward throw [A60] 	131-0202	LED-3/9W / 1050mA - 3000 K	386.4	11 W	80	7.70
	131-0203	LED-3/9W / 1050mA - 4000 K	404.3	11 W	80	7.70
	131-0206	LED-3/13W / 1400 mA - 3000 K	494.2	14 W	80	7.70
	131-0209	LED-3/13W / 1400 mA - 4000 K	516.7	14 W	80	7.70
	131-9502	LED-3/6W / 700 mA - 3000 K	260.6	7.5 W	80	7.20
	131-9506	LED-3/6W / 700 mA - 4000 K	278.5	7.5 W	80	7.20
	131-9522	LED-3/6W / 700 mA - 2700 K	242.6	7.5 W	80	7.30
	131-9944	LED-3/9W / 1050 mA - 2700 K	368.4	11 W	80	7.30
	131-9947	LED-3/13W / 1400 mA - 2700 K	467.2	14 W	80	7.30
symmetric, medium beam [M] 	131-0198	LED-3/9W / 1050mA - 3000 K	869.6	11 W	80	7.70
	131-0199	LED-3/9W / 1050mA - 4000 K	910	11 W	80	7.70
	131-0204	LED-3/13W / 1400 mA - 3000 K	1112.2	14 W	80	7.70
	131-0205	LED-3/13W / 1400 mA - 4000 K	1162.8	14 W	80	7.70
	131-9503	LED-3/6W / 700 mA - 3000 K	586.5	7.5 W	80	7.20
	131-9507	LED-3/6W / 700 mA - 4000 K	626.9	7.5 W	80	7.20
	131-9523	LED-3/6W / 700 mA - 2700 K	546	7.5 W	80	7.30
	131-9945	LED-3/9W / 1050 mA - 2700 K	829.1	11 W	80	7.30
	131-9948	LED-3/13W / 1400 mA - 2700 K	1051.6	14 W	80	7.30
symmetric, medium beam up and down [M/M] 	131-9513	LED-2x3/12W / 700 mA - 3000K	1173.1	15 W	80	7.20
	131-9519	LED-2x3/12W / 700 mA - 4000K	1254	15 W	80	7.20
	131-9527	LED-2x3/12W / 700 mA - 2700 K	1092.2	15 W	80	7.30
	131-9832	LED-2x3/18W / 1050mA - 3000 K	1739.5	22 W	80	7.70
	131-9837	LED-2x3/18W / 1050mA - 4000 K	1820.4	22 W	80	7.20
	131-9842	LED-2x3/26W / 1400mA - 3000 K	2224.9	27 W	80	7.20
	131-9847	LED-2x3/26W / 1400mA - 4000 K	2326	27 W	80	7.20
	131-9952	LED-2x3/18W / 1050 mA - 2700 K	1658.5	22 W	80	7.30
	131-9957	LED-2x3/26W / 1400 mA - 2700 K	2103.5	27 W	80	7.30
symmetric, medium beam up and forward throw down [M/A60]	131-9525	LED-2x3/12W / 700 mA - 2700 K	788.8	15 W	80	7.30
	131-9830	LED-2x3/18W / 1050mA - 3000 K	1256.2	22 W	80	7.70
	131-9835	LED-2x3/18W / 1050mA - 4000 K	1314.7	22 W	80	7.20
	131-9840	LED-2x3/26W / 1400mA - 3000 K	1606.8	27 W	80	7.20
	131-9845	LED-2x3/26W / 1400mA - 4000 K	1679.9	27 W	80	7.20

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/05/2026

Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	131-9950	LED-2x3/18W / 1050 mA - 2700 K	1197.8	22 W	80	7.30
	131-9955	LED-2x3/26W / 1400 mA - 2700 K	1519.2	27 W	80	7.30
symmetric, narrow beam [N] 	131-0200	LED-3/9W / 1050mA - 3000 K	974	11 W	80	7.70
	131-0201	LED-3/9W / 1050mA - 4000 K	1019.3	11 W	80	7.70
	131-0206	LED-3/13W / 1400 mA - 3000 K	1245.8	14 W	80	7.70
	131-0207	LED-3/13W / 1400 mA - 4000 K	1302.5	14 W	80	7.70
	131-9504	LED-3/6W / 700 mA - 3000 K	656.9	7.5 W	80	7.20
	131-9508	LED-3/6W / 700 mA - 4000 K	702.2	7.5 W	80	7.20
	131-9524	LED-3/6W / 700 mA - 2700 K	611.6	7.5 W	80	7.30
	131-9946	LED-3/9W / 1050 mA - 2700 K	928.7	11 W	80	7.30
	131-9949	LED-3/13W / 1400 mA - 2700 K	1177.9	14 W	80	7.30
	symmetric, narrow beam up and down [N/N] 	131-9515	LED-2x3/12W / 700 mA - 3000K	1314.2	15 W	80
131-9521		LED-2x3/12W / 700 mA - 4000K	1404.8	15 W	80	7.20
131-9529		LED-2x3/12W / 700 mA - 2700 K	1223.6	15 W	80	7.30
131-9834		LED-2x3/18W / 1050mA - 3000 K	1948.6	22 W	80	7.70
131-9839		LED-2x3/18W / 1050mA - 4000 K	2039.3	22 W	80	7.20
131-9844		LED-2x3/26W / 1400mA - 3000 K	1948.6	22 W	80	7.20
131-9849		LED-2x3/26W / 1400mA - 4000 K	2605.7	27 W	80	7.20
131-9954		LED-2x3/18W / 1050 mA - 2700 K	1858	22 W	80	7.30
131-9959		LED-2x3/26W / 1400 mA - 2700 K	2356.5	27 W	80	7.30
symmetric, narrow beam up and forward-throw down [N/A60] 		131-9512	LED-2x3/12W / 700 mA - 3000K	981.1	15 W	80
	131-9518	LED-2x3/12W / 700 mA - 4000K	917.8	15 W	80	7.20
	131-9526	LED-2x3/12W / 700 mA - 2700 K	854.5	15 W	80	7.30
	131-9831	LED-2x3/18W / 1050mA - 3000 K	1360.8	22 W	80	7.70
	131-9836	LED-2x3/18W / 1050mA - 4000 K	1424.1	22 W	80	7.20
	131-9841	LED-2x3/26W / 1400mA - 3000 K	1740.6	27 W	80	7.20
	131-9846	LED-2x3/26W / 1400mA - 4000 K	1819.7	27 W	80	7.20
	131-9951	LED-2x3/18W / 1050 mA - 2700 K	1297.5	22 W	80	7.30
	131-9956	LED-2x3/26W / 1400 mA - 2700 K	1645.7	27 W	80	7.30
	symmetric, narrow beam up and medium beam down [N/M] 	131-9514	LED-2x3/12W / 700 mA - 3000K	1243.7	15 W	80
131-9520		LED-2x3/12W / 700 mA - 4000K	1329.4	15 W	80	7.20


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/05/2026

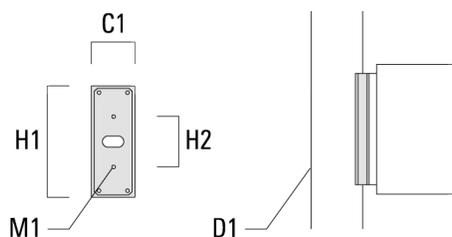
Surface Mounted Wall Luminaires

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
	131-9528	LED-2x3/12W / 700 mA - 2700 K	1157.9	15 W	80	7.30
	131-9833	LED-2x3/18W / 1050mA - 3000 K	1844	22 W	80	7.70
	131-9838	LED-2x3/18W / 1050mA - 4000 K	1929.8	22 W	80	7.20
	131-9843	LED-2x3/26W / 1400mA - 3000 K	2358.7	27 W	80	7.20
	131-9848	LED-2x3/26W / 1400mA - 4000 K	2465.9	27 W	80	7.20
	131-9953	LED-2x3/18W / 1050 mA - 2700 K	1758.3	22 W	80	7.30
	131-9958	LED-2x3/26W / 1400 mA - 2700 K	2230	27 W	80	7.30

Mounting Accessories

Column fitter

Description	Part ID	C1	D1	H1	H2	M1	Weight (lb)
CF-410/420	131-9140	3.27	≥ 5.51	8.66	3.94	0.24	1.32



Surface Mounted Wall Luminaires

Surface Collar

Description	Part ID	A	B	C1	D1	D2	D3	M1	M2
VLS/SLS Surface Collar	131-6004	8.66	3.66	1.75	∅1	∅1.5	∅0.38	6	2

