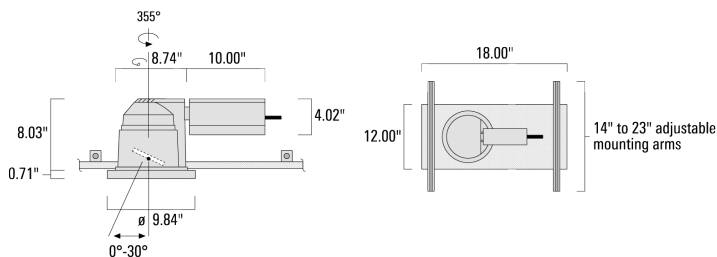


DOC240-GB LED Stainless Steel

Ceiling Luminaires

we-ef



Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA LED lens array. Integral driver in thermally separated compartment. Factory-installed circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/15/2025


DOC240-GB LED Stainless Steel



Ceiling Luminaires

Specifications

Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

DOC240-GB LED Stainless Steel

Ceiling Luminaires



Options

Light distribution



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam, 'sharp cut-off'



symmetric, very narrow beam [VN]



linear spread, very narrow beam



symmetric, medium beam [M]



symmetric, wide beam [W]



linear spread, medium beam [M]

Color temperature



3000 K



4000 K

Nominal Watt







21 W

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/15/2025

Ceiling Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-6208+185-2632	LED-12/18W / 500 mA - 3000 K	2183.2	21 W	80	15.60
	134-6212+185-2632	LED-12/18W / 500 mA - 4000 K	2335.5	21 W	80	15.60
linear spread, very narrow beam, 'sharp cut-off' 	134-6210+185-2632	LED-12/18W / 500 mA - 3000 K	2124.7	21 W	80	15.60
	134-6214+185-2632	LED-12/18W / 500 mA - 4000 K	2272.9	21 W	80	15.60
linear spread, very narrow beam 	134-6209+185-2632	LED-12/18W / 500 mA - 3000 K	2034.5	21 W	80	15.60
	134-6213+185-2632	LED-12/18W / 500 mA - 4000 K	2176.4	21 W	80	15.60
symmetric, medium beam [M] 	134-6208	LED-12/18W / 500 mA - 3000 K	2223.1	21 W	80	15.60
	134-6212	LED-12/18W / 500 mA - 4000 K	2378.2	21 W	80	15.60
symmetric, very narrow beam [VN] 	134-6209	LED-12/18W / 500 mA - 3000 K	2137.9	21 W	80	15.60
	134-6213	LED-12/18W / 500 mA - 4000 K	2287	21 W	80	15.60
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-6210	LED-12/18W / 500 mA - 3000 K	2281.9	21 W	80	15.60
	134-6214+185-2632	LED-12/18W / 500 mA - 4000 K	2441.1	21 W	80	15.60
symmetric, wide beam [W]	134-6211+185-2632	LED-12/18W / 500 mA - 3000 K	2008.5	21 W	80	15.60
	134-6215	LED-12/18W / 500 mA - 4000 K	2148.7	21 W	80	15.60

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/15/2025

DOC240-GB LED Stainless Steel

Ceiling Luminaires



Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
