
Ceiling Luminaires



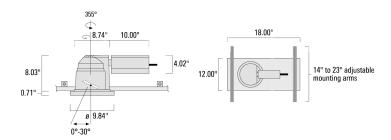

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA LED lens array. Integral driver in thermally separated compartment. Factory-installed circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.

Suitable for installation in non-insulated ceiling. A preinstallation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

DOC240-GB LED Stainless Steel



Ceiling Luminaires

Specifications Material description

Body Luminaire body constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Additional information

| Lifetime | LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25° |
|----------|---|
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |



Ceiling Luminaires

Options Light distribution



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam, 'sharp cut-off'



symmetric, very narrow beam [VN]



linear spread, very narrow beam



symmetric, medium beam [M]



symmetric, wide beam [W]



linear spread, medium beam [M]

Color temperature Nominal Watt



K



21 W



Ceiling Luminaires

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|-------------------------------------|-------------------|------------------------------|---------------------|-------------------|-----|-------------|
| linear spread, medium beam [M] | 134-6208+185-2632 | LED-12/18W / 500 mA - 3000 K | 2183.2 | 21 W | 80 | 15.60 |
| • | 134-6212+185-2632 | LED-12/18W / 500 mA - 4000 K | 2335.5 | 21 W | 80 | 15.60 |
| linear spread, very narrow beam, | 134-6210+185-2632 | LED-12/18W / 500 mA - 3000 K | 2124.7 | 21 W | 80 | 15.60 |
| 'sharp cut-off' + | 134-6214+185-2632 | LED-12/18W / 500 mA - 4000 K | 2272.9 | 21 W | 80 | 15.60 |
| linear spread, very narrow beam | 134-6209+185-2632 | LED-12/18W / 500 mA - 3000 K | 2034.5 | 21 W | 80 | 15.60 |
| | 134-6213+185-2632 | LED-12/18W / 500 mA - 4000 K | 2176.4 | 21 W | 80 | 15.60 |
| symmetric, medium beam [M] | 134-6208 | LED-12/18W / 500 mA - 3000 K | 2223.1 | 21 W | 80 | 15.60 |
| | 134-6212 | LED-12/18W / 500 mA - 4000 K | 2378.2 | 21 W | 80 | 15.60 |
| symmetric, very narrow beam [VN] | 134-6209 | LED-12/18W / 500 mA - 3000 K | 2137.9 | 21 W | 80 | 15.60 |
| | 134-6213 | LED-12/18W / 500 mA - 4000 K | 2287 | 21 W | 80 | 15.60 |
| symmetric, very narrow beam, 'sharp | 134-6210 | LED-12/18W / 500 mA - 3000 K | 2281.9 | 21 W | 80 | 15.60 |
| cut-off' [VNS] | 134-6214+185-2632 | LED-12/18W / 500 mA - 4000 K | 2441.1 | 21 W | 80 | 15.60 |
| symmetric, wide beam [W] | 134-6211+185-2632 | LED-12/18W / 500 mA - 3000 K | 2008.5 | 21 W | 80 | 15.60 |
| | 134-6215 | LED-12/18W / 500 mA - 4000 K | 2148.7 | 21 W | 80 | 15.60 |

DOC240-GB LED Stainless Steel



Ceiling Luminaires

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--------------------|---------|--------------|---------------------|-------------------|-----|-------------|
| | | | | | | |

