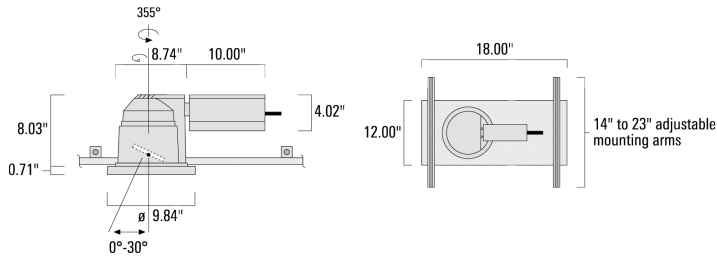


## Ceiling Luminaires



### Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA LED lens array. Integral driver in thermally separated compartment. Factory-installed circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch. Gimbal mounted, 0-30° tiltable and 355° rotatable.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Ceiling Luminaires

Specifications  
Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	<div></div> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	-----------------------------------------------------------------------------------------

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Ceiling Luminaires

Options

Light distribution



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam, 'sharp cut-off'



symmetric, very narrow beam [VN]



linear spread, very narrow beam



symmetric, medium beam [M]



symmetric, wide beam [W]




linear spread, medium beam [M]

Color temperature

Nominal Watt



3000 K









4000 K

21 W

## Ceiling Luminaires

## Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-6208+185-2632	LED-12/18W / 500 mA - 3000 K	2183.2	21 W	80	15.60
	134-6212+185-2632	LED-12/18W / 500 mA - 4000 K	2335.5	21 W	80	15.60
linear spread, very narrow beam, 'sharp cut-off' 	134-6210+185-2632	LED-12/18W / 500 mA - 3000 K	2124.7	21 W	80	15.60
	134-6214+185-2632	LED-12/18W / 500 mA - 4000 K	2272.9	21 W	80	15.60
linear spread, very narrow beam 	134-6209+185-2632	LED-12/18W / 500 mA - 3000 K	2034.5	21 W	80	15.60
	134-6213+185-2632	LED-12/18W / 500 mA - 4000 K	2176.4	21 W	80	15.60
symmetric, medium beam [M] 	134-6208	LED-12/18W / 500 mA - 3000 K	2223.1	21 W	80	15.60
	134-6212	LED-12/18W / 500 mA - 4000 K	2378.2	21 W	80	15.60
symmetric, very narrow beam [VN] 	134-6209	LED-12/18W / 500 mA - 3000 K	2137.9	21 W	80	15.60
	134-6213	LED-12/18W / 500 mA - 4000 K	2287	21 W	80	15.60
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-6210	LED-12/18W / 500 mA - 3000 K	2281.9	21 W	80	15.60
	134-6214+185-2632	LED-12/18W / 500 mA - 4000 K	2441.1	21 W	80	15.60
symmetric, wide beam [W]	134-6211+185-2632	LED-12/18W / 500 mA - 3000 K	2008.5	21 W	80	15.60
	134-6215	LED-12/18W / 500 mA - 4000 K	2148.7	21 W	80	15.60

## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 12/25/2025

Ceiling Luminaires

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
