

# QRI354 LED


## Wall luminaires recessed



### Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries.

A pre-installation blockout is available and recommended for mounting in concrete walls.

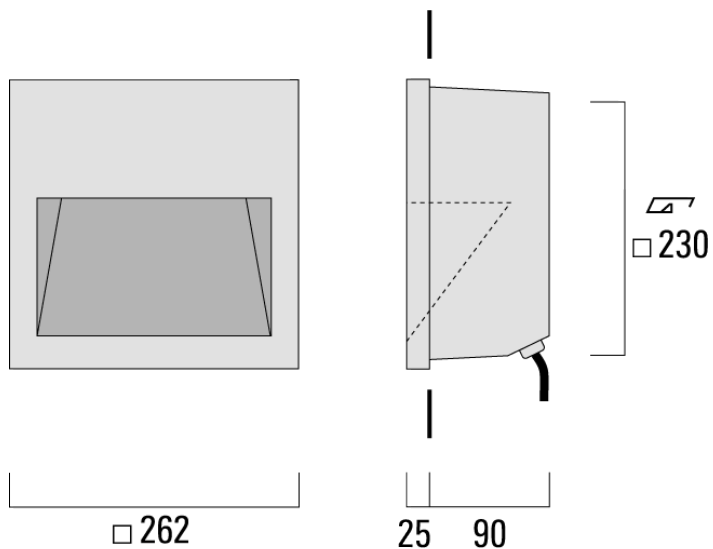




# QRI354 LED

## Wall luminaires recessed

### Specifications

#### Material description

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE+Primer

---

#### Electrical description

---

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

---

#### Additional information

**WE-EF LIGHTING Pty Ltd**

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

# QRI354 LED

Wall luminaires recessed

## Options

### Light distribution



asymmetric, forward throw [A60]

### Colour temperature



3000 K



4000 K



2700 K


### Nominal Watt

0 W

# QRI354 LED

Wall luminaires recessed


## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	197-9083	LED-6W / 350 mA - 3000 K	399.7	8 W	80	3.40
	197-9084	LED-12W / 350 mA - 3000 K	511.9	15 W	80	3.40
	197-9085	LED-6W / 350 mA - 4000 K	422.6	8 W	80	3.40
	197-9086	LED-12W / 350 mA - 4000 K	531	15 W	80	3.40
	197-9090	LED-6W / 350 mA - 2700 K	376.9	8 W	80	3.40
	197-9091	LED-12W / 350 mA - 2700 K	473.6	15 W	80	3.40

### Mounting Accessories

#### Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BQR35-I	197-0129	272	272	125	125

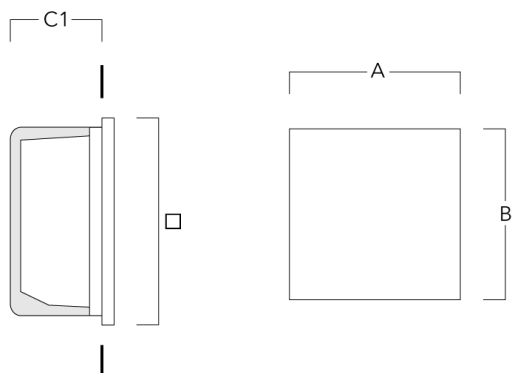

Installation blackout BQR35-II	197-0132	272	272	150	150
--------------------------------	----------	-----	-----	-----	-----

