

QRI354 LED

Recessed Wall Luminaires

we-ef



Description

Recessed LED wall luminaire.

ADA (American Disabilities Act) Compliant.


IP55. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

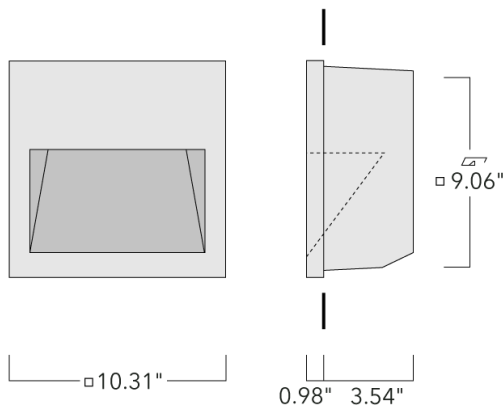

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 09/07/2025

Recessed Wall Luminaires

Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Tempered glass lens.
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	LED >60,000 h Ta 25°(B10/70) Control gear >50,000 h Ta 25°
Listings	ETL listed. Suitable for wet locations.

QRI354 LED

Recessed Wall Luminaires



Options

Light distribution



asymmetric, forward-throw [A60]



asymmetric, forward throw [A60]

Color temperature



3000 K



4000 K



2700 K

Nominal Watt

1 W

0 W

WE-EF LIGHTING USA, LLC



410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 09/07/2025

QRI354 LED



Recessed Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
<div>asymmetric, forward throw [A60]</div> 	197-9084	LED-12W / 350 mA - 3000 K	511.9	15 W	80	3.40
	197-9086	LED-12W / 350 mA - 4000 K	531	15 W	80	3.40
	197-9090	LED-6W / 350 mA - 2700 K	376.9	8 W	80	7.10
	197-9091	LED-12W / 350 mA - 2700 K	473.6	15 W	80	7.10
<div>asymmetric, forward-throw [A60]</div> 	197-0352	LED-6/6W / 350 mA - 3000 K	354	7.7 W	80	7.10
	197-0353	LED-6/6W / 350 mA - 4000 K	388.3	5.6 W	80	7.10

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BQR35-I-RE	197-0129	10.70	10.70	4.92	125

