


# QRI354 LED

## Wall luminaires recessed

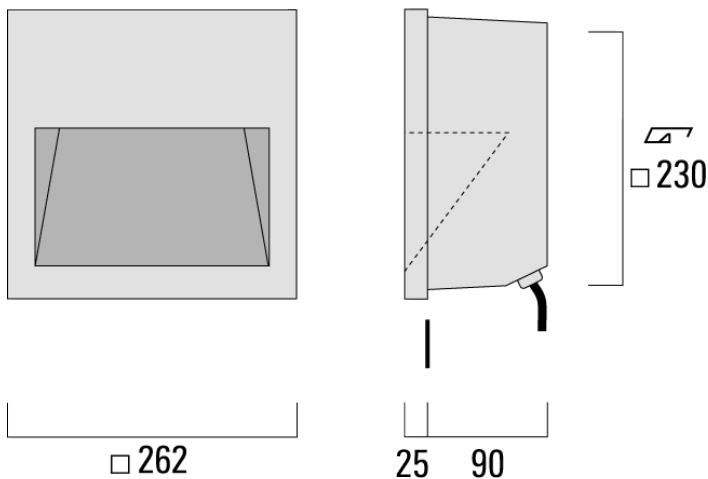

### Description

IP55. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone rubber gasket.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.

Pre-installation blockout is recommended for mounting in concrete, available on request.





# QRI354 LED

## Wall luminaires recessed

### Specifications

#### Material description

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP55
Impact resistance	IK08
Corrosion resistance	5CE

---

#### Electrical description

---

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

---

#### Additional information

# QRI354 LED

Wall luminaires recessed

## Options

### Light distribution



asymmetric, forward throw [A60]

### Colour temperature



3000 K



4000 K



2700 K


### Nominal Watt

0 W

# QRI354 LED

Wall luminaires recessed


## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	197-9083	LED-6W / 350 mA - 3000 K	399.7	8 W	80	3.40
	197-9084	LED-12W / 350 mA - 3000 K	511.9	15 W	80	3.40
	197-9085	LED-6W / 350 mA - 4000 K	422.6	8 W	80	3.40
	197-9086	LED-12W / 350 mA - 4000 K	531	15 W	80	3.40
	197-9090	LED-6W / 350 mA - 2700 K	376.9	8 W	80	3.40
	197-9091	LED-12W / 350 mA - 2700 K	473.6	15 W	80	3.40

### Mounting Accessories

#### Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BQR35-I	197-0129	272	272	125	125

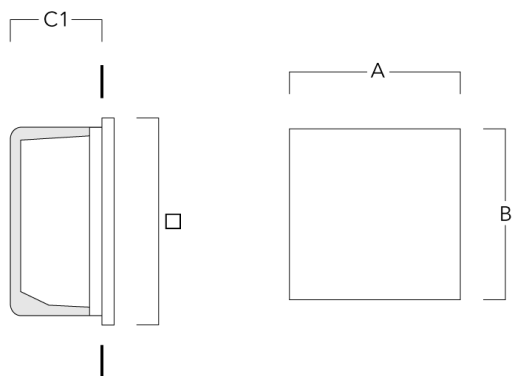

Installation blackout BQR35-II	197-0132	272	272	150	150
--------------------------------	----------	-----	-----	-----	-----

