

Recessed Wall Luminaires**Description**

Recessed LED wall luminaire.

ADA (American Disabilities Act) Compliant.


IP55. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

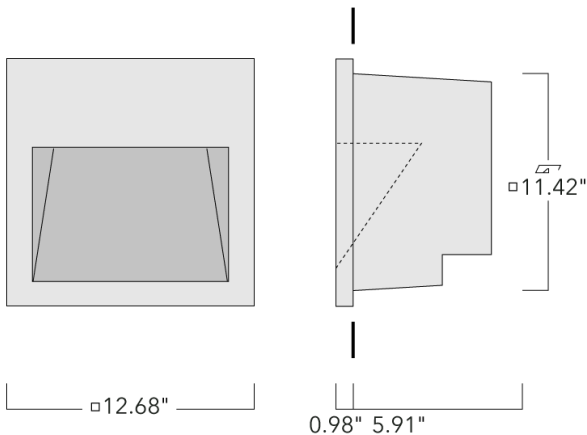

Recessed Wall Luminaires

Specifications
Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Tempered glass lens.
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	-----------------------------------------------------------------------------------------

Additional information

Ambient Temperature	Ta less than 25 deg C
Listings	ETL listed. Suitable for wet locations.

Recessed Wall Luminaires


Options

Light distribution



asymmetric, forward-throw [A60]

Color temperature



4000 K




3000 K

Nominal Watt

18 W

Recessed Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
asymmetric, forward-throw [A60] 	197-6300	14 LED 14W (3000K)	548	18 W	80	16.00
	197-6301	14 LED 14W (4000K)	548	18 W		16.00