

QRI374 LED

Recessed Wall Luminaires

we-ef



Description

Recessed LED wall luminaire.


ADA (American Disabilities Act) Compliant.

IP55. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

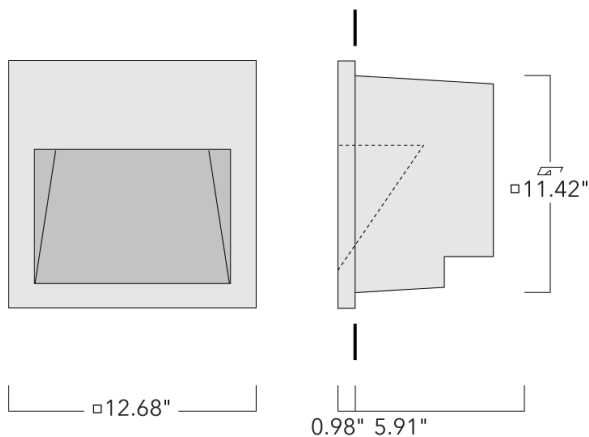

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

Recessed Wall Luminaires

Specifications
Material description

| | |
|----------------------|---|
| Body | Luminaire body and lens frame constructed in die cast aluminum. |
| Lens | Tempered glass lens. |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP55 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|--------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
|--------------|---|

Additional information

| | |
|---------------------|---|
| Ambient Temperature | Ta less than 25 deg C |
| Listings | ETL listed. Suitable for wet locations. |

QRI374 LED

Recessed Wall Luminaires



Options

Light distribution



asymmetric, forward-throw [A60]

Color temperature



4000 K



3000 K

Nominal Watt

18 W

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/14/2025

QRI374 LED



Recessed Wall Luminaires

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|---|----------|--------------------|------------------|-------------------|-----|-------------|
| asymmetric, forward-throw [A60]  | 197-6300 | 14 LED 14W (3000K) | 548 | 18 W | 80 | 16.00 |
| | 197-6301 | 14 LED 14W (4000K) | 548 | 18 W | | 16.00 |