




Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

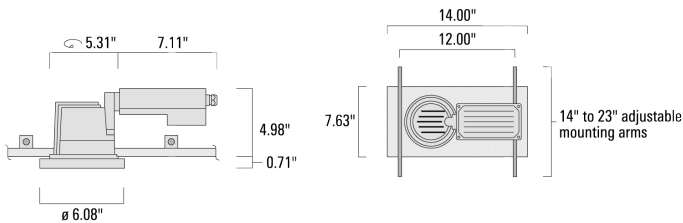

Ceiling Luminaires

Specifications
Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	<div></div> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
Listings	ETL listed. Suitable for wet applications.

Options

Light distribution



symmetric, very narrow beam, 'sharp cut-off' [VNS]



symmetric, very narrow beam [VN]



symmetric, medium beam [M]



symmetric, wide beam [W]



linear spread, medium beam [M]

Color temperature



3000 K








4000 K

Nominal Watt

3 W

Ceiling Luminaires


Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-6115+134-1381	LED-12/24W / 700 mA - 3000 K	2944.8	27 W	80	6.40
	134-6125+134-1381	LED-12/24W / 700 mA - 4000 K	3147.9	27 W	80	6.40
symmetric, medium beam [M] 	134-6115	LED-12/24W / 700 mA - 3000 K	2998.6	27 W	80	6.40
	134-6125+134-1381	LED-12/24W / 700 mA - 4000 K	3205.4	27 W	80	6.40
symmetric, very narrow beam [VN] 	134-6116	LED-12/24W / 700 mA - 3000 K	2883.7	27 W	80	6.40
	134-6126	LED-12/24W / 700 mA - 4000 K	3082.5	27 W	80	6.40
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-6117+134-1381	LED-12/24W / 700 mA - 3000 K	3077.9	27 W	80	6.40
	134-6123	LED-12/24W / 700 mA - 4000 K	3290.2	27 W	80	6.40
symmetric, wide beam [W] 	134-6118+134-1440	LED-12/24W / 700 mA - 3000 K	2709.2	27 W	80	6.40
	134-6124+134-1381	LED-12/24W / 700 mA - 4000 K	2896	27 W	80	6.40

Mounting Accessories

Installation blackout


Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	15.08"	7.87"	8.23"	195

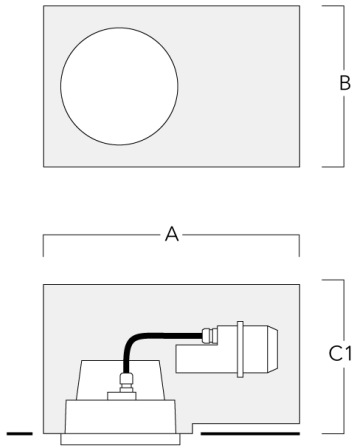

Optical Accessories

Softening Lens


Description	Part ID	C1
IO-360-DAC/DOC220-LED	134-1440	4.13



Ceiling Luminaires


Honeycomb louvre

Description	Part ID	C1
IW-DOC22_LED	134-1444	4.13



Wallwash lens

Description	Part ID	C1
IO-20-WW-DAC/DOC220-LED	134-1491	4.13



Ceiling Luminaires

Linear spread lens

Description	Part ID	C1
IO-180-DAC/DOC220-LED	134-1381	4.13

