

### Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

## Ceiling Luminaires

---

### Specifications

#### Material description

---

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

---

#### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

---

#### Additional information

---

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
Listings	ETL listed. Suitable for wet applications.

---

## Ceiling Luminaires

### Options

#### Light distribution



symmetric, very narrow beam, 'sharp cut-off' [VNS]



symmetric, very narrow beam [VN]



symmetric, medium beam [M]



symmetric, wide beam [W]



linear spread, medium beam [M]

#### Color temperature



3000 K








4000 K

#### Nominal Watt

3 W

Ceiling Luminaires


**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-6115+134-1381	LED-12/24W / 700 mA - 3000 K	2944.8	27 W	80	6.40
	134-6125+134-1381	LED-12/24W / 700 mA - 4000 K	3147.9	27 W	80	6.40
symmetric, medium beam [M] 	134-6115	LED-12/24W / 700 mA - 3000 K	2998.6	27 W	80	6.40
	134-6125+134-1381	LED-12/24W / 700 mA - 4000 K	3205.4	27 W	80	6.40
symmetric, very narrow beam [VN] 	134-6116	LED-12/24W / 700 mA - 3000 K	2883.7	27 W	80	6.40
	134-6126	LED-12/24W / 700 mA - 4000 K	3082.5	27 W	80	6.40
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-6117+134-1381	LED-12/24W / 700 mA - 3000 K	3077.9	27 W	80	6.40
	134-6123	LED-12/24W / 700 mA - 4000 K	3290.2	27 W	80	6.40
symmetric, wide beam [W] 	134-6118+134-1440	LED-12/24W / 700 mA - 3000 K	2709.2	27 W	80	6.40
	134-6124+134-1381	LED-12/24W / 700 mA - 4000 K	2896	27 W	80	6.40

**Mounting Accessories**

**Installation blackout**

Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	15.08"	7.87"	8.23"	195

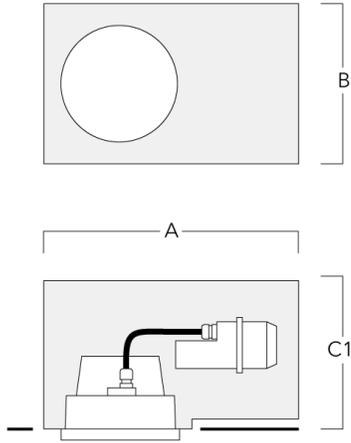


**Ceiling Luminaires**

---

**Optical Accessories**

**Softening Lens**

Description	Part ID	C1
IO-360-DAC/DOC220-LED	134-1440	4.13




## Ceiling Luminaires

### Honeycomb louvre

---

Description	Part ID	C1
IW-DOC22_LED	134-1444	4.13

---




---

### Wallwash lens

---

Description	Part ID	C1
IO-20-WW-DAC/DOC220-LED	134-1491	4.13

---




**Ceiling Luminaires**

---

**Linear spread lens**

Description	Part ID	C1
IO-180-DAC/DOC220-LED	134-1381	4.13



C1