


**EFC120 LED**

**Inground luminaires**

***we-ef***

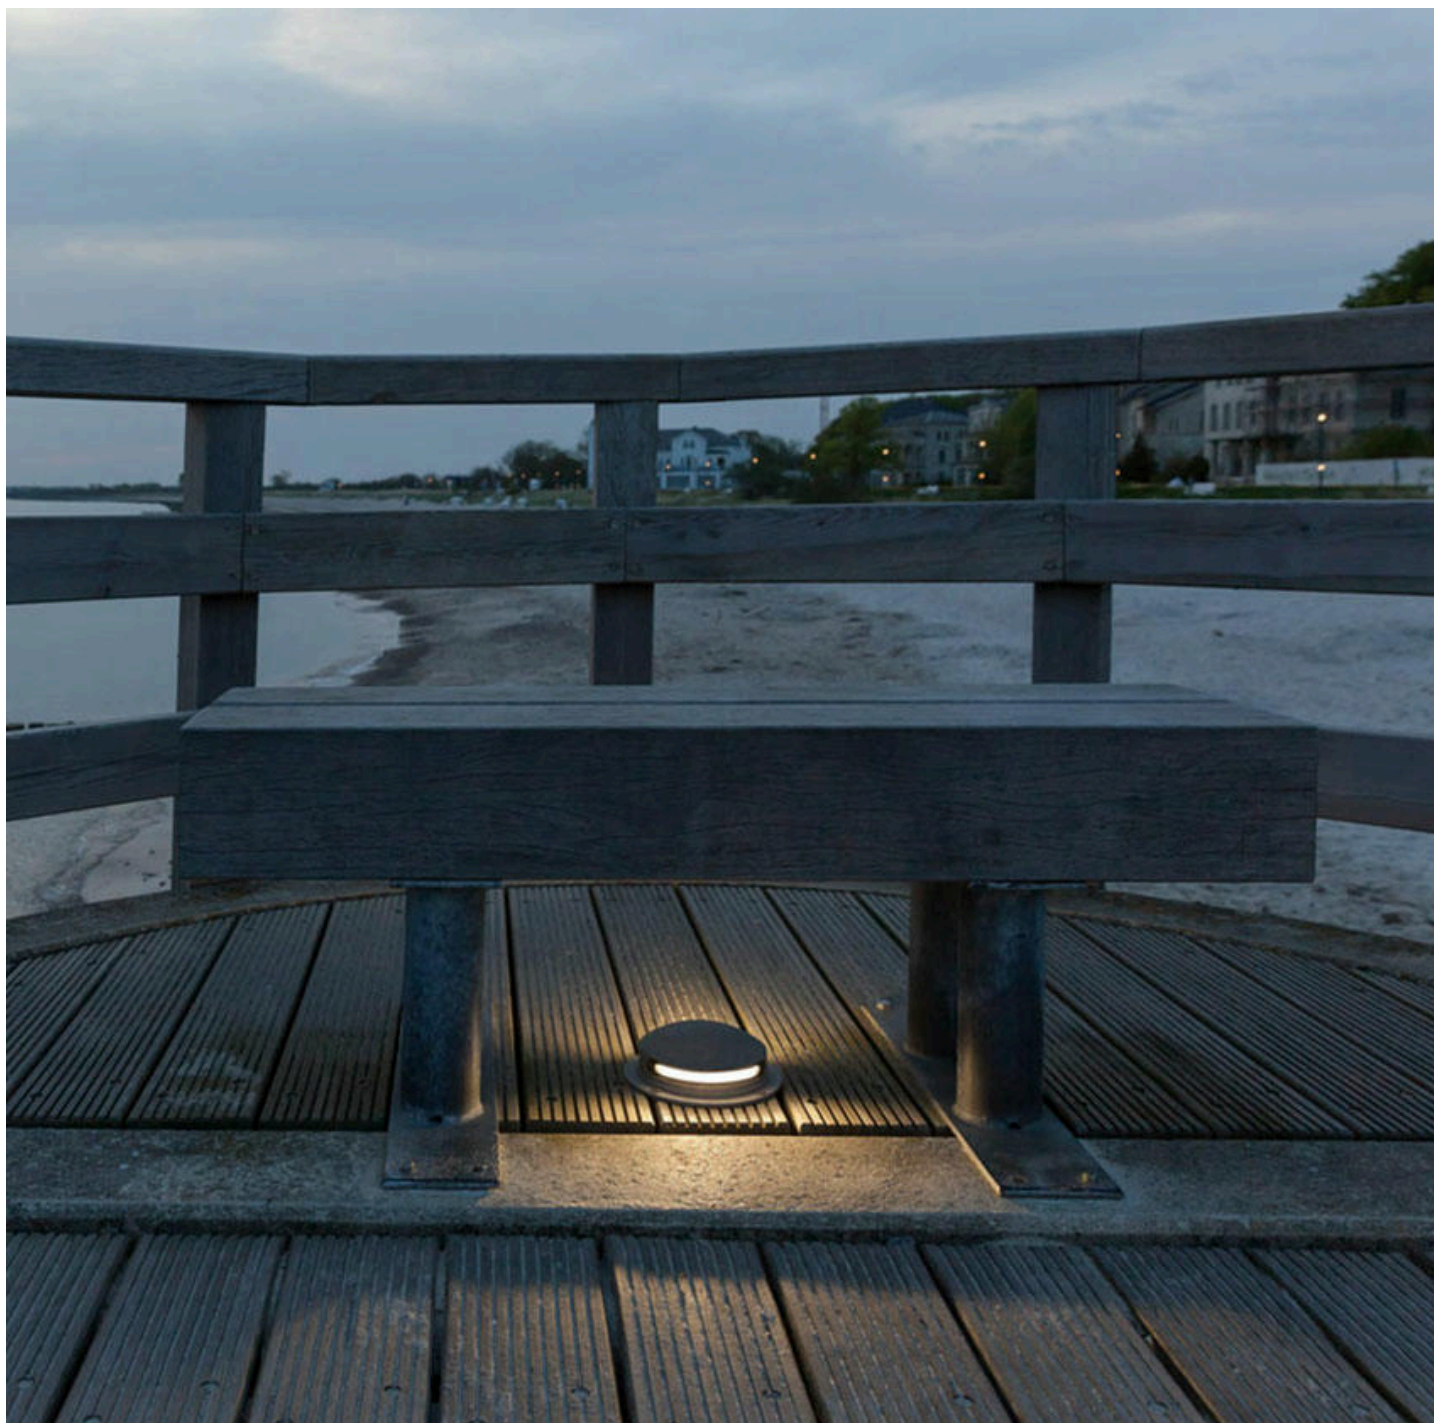

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29


<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

# EFC120 LED

## Inground luminaires

**we-ef**

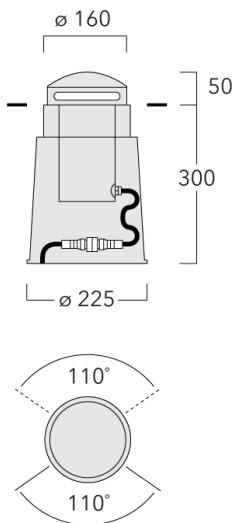

### Description

IP67. IK09. Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy. Luminaire can be driven over at low speed. 5CE superior corrosion protection including PCS hardware. Optical lens made from PMMA. Silicone rubber gasket. Factory-sealed termination chamber with cable gland and 1.5 m of flexible PVC-free cable.

Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blackout included in supply. Optional 2200 K version available. To be specified at time of ordering.

### WE-EF LIGHTING (Thailand) Co., Ltd.





57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

**Specifications****Material description**

---

Body	Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy.
Lens	PC
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

---

**Additional information**

---

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

---

# EFC120 LED

## Inground luminaires

### Options

#### Light distribution



controlled beam, one-sided



controlled beam, two-sided

#### Colour temperature



3000 K





4000 K

#### Nominal Watt

1 W

2 W

**Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
controlled beam, one-sided 	185-2526	LED-6/6W / 350 mA - 3000 K	497	7.5 W	80	5.10
	185-2560	LED-6/6W / 350 mA - 4000 K	545.1	7.5 W	80	5.10
controlled beam, two-sided 	185-2559	LED-2x6/12W / 350 mA - 3000K	992.4	14 W	80	5.10
	185-2768	LED-2x6/12W / 350 mA - 4000K	1088.4	14 W	80	5.10