

# STO279 LED

## Wall luminaires recessed




### Description

IP66. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate lens. Silicone rubber gasket.





Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries. Optional 2200 K version available. To be specified at time of ordering.

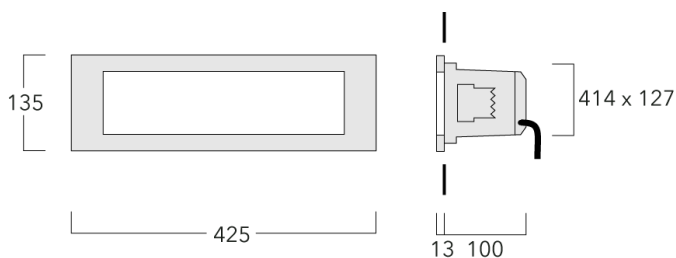Pre-installation blockout is recommended for mounting in concrete, available on request.



**Wall luminaires recessed****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

---

**Additional information**

---

Lifetime	Ta=25° L80B10 > 54000h
----------	------------------------

---

# STO279 LED

Wall luminaires recessed

## Options

### Light distribution



diffused distribution

### Colour temperature



3000 K



4000 K



2700 K

### Nominal Watt


15 W

# STO279 LED

Wall luminaires recessed

**we-ef**

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
diffused distribution 	133-0352	LED-9/21W / 500 mA - 3000 K	802.5	24 W	80	2.30
	133-0353	LED-9/21W / 500 mA - 4000 K	857.4	24 W	80	2.30
	133-0447	LED-9/21W / 500 mA - 2700 K	747.5	24 W	80	2.30

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29


<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

**Mounting Accessories**

**Installation blackout**

Description	Part ID	A	B	C1	C
Installation blackout BST27-I	133-0217	447	157	125	130

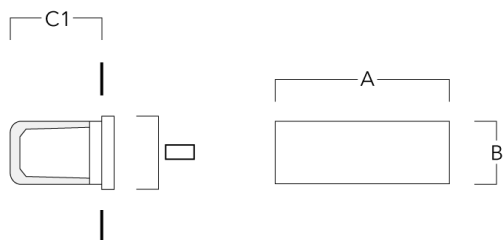

Installation blackout BST27-II	133-0219	447	157	135	140
--------------------------------	----------	-----	-----	-----	-----

