


Description

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.

A pre-installation blackout is available and recommended for mounting in concrete walls. To be ordered separately.


Optional 2200 K version available. To be specified at time of ordering.

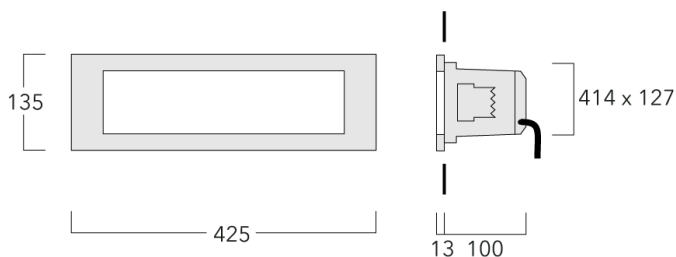

Wall luminaires recessed

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE+Primer





Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter


Additional information

Lifetime	Ta=40° L80B10 > 54000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Options

Light distribution	Colour temperature	Nominal Watt
 diffused distribution	 3000 K	15 W
	 4000 K	
	 2700 K	


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
diffused distribution 	133-0354	LED-9/21W / 500 mA - 3000 K	802.5	24 W	80	2.30
	133-0355	LED-9/21W / 500 mA - 4000 K	857.4	24 W	80	2.30
	133-0448	LED-9/21W / 500 mA - 2700 K	747.5	24 W	80	2.30

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST27-I	133-0217	447	157	125	130

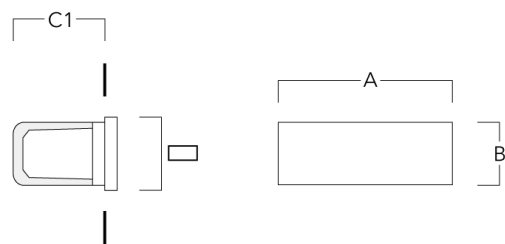

Installation blackout BST27-II	133-0219	447	157	135	140
--------------------------------	----------	-----	-----	-----	-----

