


**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Anodised aluminium reflector, PMMA-Diffusor-Lens for glare control and soft wide beam distribution. Intergal ECG control gear in thermally separated compartment.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

2700 K option available on request.

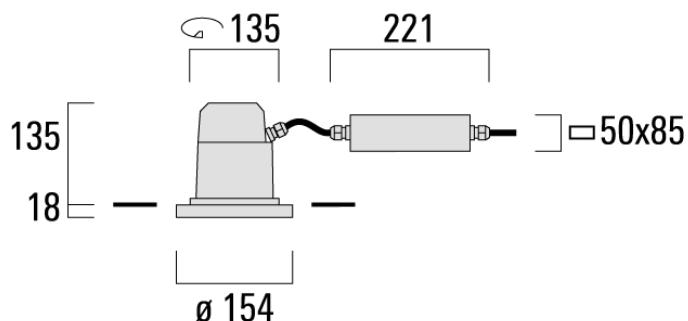

Ceiling luminaires**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens, hinged
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Standard - optional DALI version available

Additional information

Lifetime	Ta=40° L70B50 > 50000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Options**Light distribution**

symmetric, wide beam [B]

Colour temperature

27 W



3000 K




4000 K




2700 K

Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, wide beam [B] 	134-1483	LED-FT-24W / 700 mA - 3000 K	2433.8	27 W	80	2.30
	134-1484	LED-FT-24W / 700 mA - 4000 K	2537.7	27 W	80	2.30
	134-1939	LED-FT-24W / 700 mA - 2700 K	2335.8	27 W	80	2.30

Mounting Accessories**Installation breakout, proud**

Description	Part ID	A	B	C1	C
Installation breakout BDO22-I	134-0797	383	200	209	195

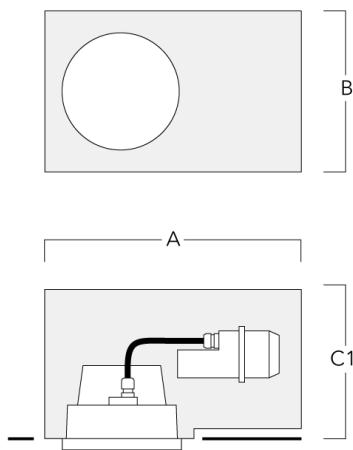**Installation breakout, flush**

Description	Part ID	A	B	C1	C
Installation breakout BDO22-II	134-1161	383	200	227	195

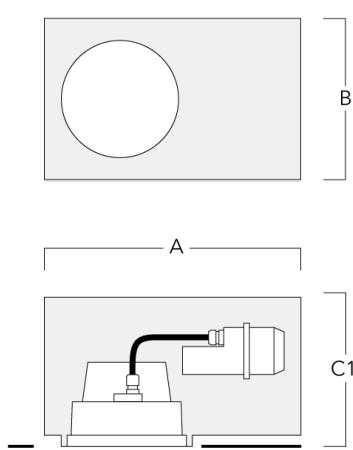

Control**DALI interface**

Description	Part ID	C
DALI interface	430-0013	90