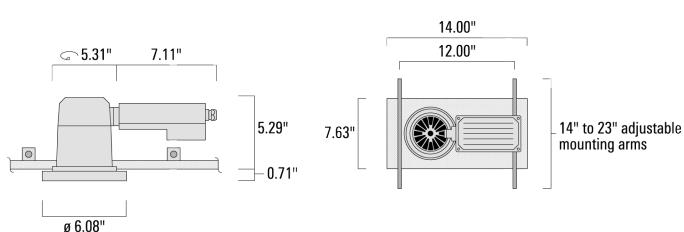


Ceiling Luminaires**Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. Integral driver in thermally separated compartment. Factory-installed LED circuit board. Tunable White technology. Darklight anodized aluminum reflector for superior illumination and glare control. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Ceiling Luminaires**Specifications****Material description**

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description


Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25°/40° L70B50 > 50000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Ceiling Luminaires**Options****Light distribution**

symmetric, wide beam [W]

Color temperature

3000 K


4000 K

Nominal Watt

24 W

27 W

Ceiling Luminaires**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, wide beam [W]	134-1483	LED-FT-24W (3000K)	2433.8	27 W	80	7.10
 A diagram showing a central vertical line with a square at the top, representing a light source. A wide, conical beam of light extends downwards from the source, with the widest part at the base and tapering off towards the top, representing a symmetric, wide beam distribution.	134-1484	LED-FT-24W (4000K)	2537.7	27 W	80	7.10

Ceiling Luminaires

Mounting Accessories

Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BDO22-I	134-0797	15.08"	7.87"	8.23"	195

