**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone rubber gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Anodised aluminium reflector with PMMA diffuser. Two cable entries.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens, hinged
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options

Light distribution



symmetric, wide beam [B]

Colour temperature



3000 K



4000 K




2700 K

Nominal Watt

27 W


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, wide beam [B] 	134-1483	LED-FT-24W / 700 mA - 3000 K	2433.8	27 W	80	2.30
	134-1484	LED-FT-24W / 700 mA - 4000 K	2537.7	27 W	80	2.30
	134-1939	LED-FT-24W / 700 mA - 2700 K	2335.8	27 W	80	2.30

Mounting Accessories


Installation blackout, proud

Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	383	200	209	195

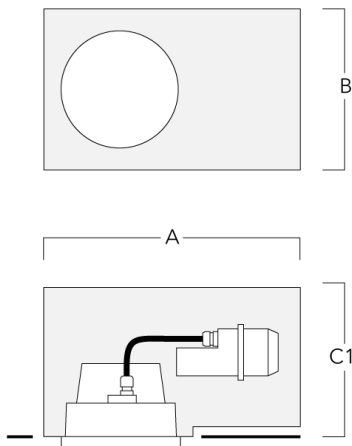

Installation blackout, flush

Description	Part ID	A	B	C1	C
Installation blackout BD022-II	134-1161	383	200	227	195

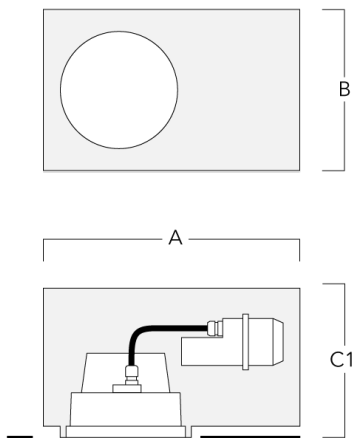

Control

DALI interface

Description	Part ID	C
DALI interface	430-0013	90