


# DOC220-FT LED Stainless Steel

## Ceiling Luminaires

**we-ef**

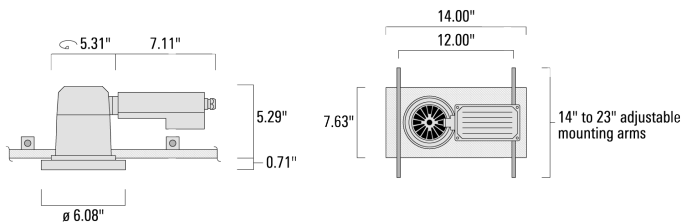

### Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. PMMA-Diffuser-Lens for glare control and soft wide beam distribution. Anodized aluminum reflector. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code – Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 08/14/2025


# DOC220-FT LED Stainless Steel



## Ceiling Luminaires

### Specifications

#### Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

#### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

#### Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

DOC220-FT LED Stainless Steel  
Ceiling Luminaires



Options

Light distribution



symmetric, wide beam, Darklight [BD]

Color temperature



3000 K



4000 K

Nominal Watt

24 W

27 W

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 08/14/2025


# DOC220-FT LED Stainless Steel

## Ceiling Luminaires



### Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, wide beam, Darklight [BD]	134-6149	LED-FT-24W (3000K)	2266.6	27 W	80	7.10
	134-6150	LED-FT-24W (4000K)	2364.6	27 W	80	7.10



Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	15.08"	7.87"	8.23"	195

