






### Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory- sealed and does not need to be opened during the installation.

Optional 2200 K version available. To be specified at time of ordering.

**Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.025 m <sup>2</sup>

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	1/2 kV

---

**Additional information**

---

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)

---

### Options

#### Light distribution



symmetric, medium beam [M]



symmetric, very narrow beam, sharp cut-off [EES]



linear spread, very narrow beam, sharp cut-off [EES]



symmetric, wide beam [B]



symmetric, very narrow beam [EE]



linear spread, very narrow beam [EE]



wallwash

#### Colour temperature



3000 K



4000 K










2700 K

#### Nominal Watt

16 W


### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE] 	145-0055+145-0050	LED-6/12W / 700 mA - 3000 K	1386.3	14.5 W	80	1.70
	145-0056+145-0050	LED-6/12W / 700 mA - 4000 K	1481.9	14.5 W	80	1.70
	145-0278+145-0050	LED-6/12W / 700 mA - 2700 K	1393.3	14.5 W	80	1.70
linear spread, very narrow beam, sharp cut-off [EES] 	145-0034+145-0050	LED-6/12W / 700 mA - 3000 K	1526.2	14.5 W	80	1.70
	145-0035+145-0050	LED-6/12W / 700 mA - 4000 K	1631.5	14.5 W	80	1.70
	145-0292+145-0050	LED-6/12W / 700 mA - 2700 K	1499.6	14.5 W	80	1.70
symmetric, medium beam [M] 	145-0031	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	1.70
	145-0032	LED-6/12W / 700 mA - 4000 K	1616.1	14.5 W	80	1.70
	145-0283	LED-6/12W / 700 mA - 2700 K	1407.5	14.5 W	80	1.70
symmetric, very narrow beam [EE] 	145-0055	LED-6/12W / 700 mA - 3000 K	1496.5	14.5 W	80	1.70
	145-0056	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	1.70
	145-0278	LED-6/12W / 700 mA - 2700 K	1393.3	14.5 W	80	1.70
symmetric, very narrow beam, sharp cut-off [EES] 	145-0034	LED-6/12W / 700 mA - 3000 K	1610.7	14.5 W	80	1.70
	145-0035	LED-6/12W / 700 mA - 4000 K	1721.8	14.5 W	80	1.70
	145-0292	LED-6/12W / 700 mA - 2700 K	1499.6	14.5 W	80	1.70
symmetric, wide beam [B] 	145-0052	LED-6/12W / 700 mA - 3000 K	1347.1	14.5 W	80	1.70
	145-0053	LED-6/12W / 700 mA - 4000 K	1440	14.5 W	80	1.70
	145-0284	LED-6/12W / 700 mA - 2700 K	1254.2	14.5 W	80	1.70
wallwash 	145-0031+145-0145	LED-6/12W / 700 mA - 3000 K	1213	14.5 W	80	1.70
	145-0032+145-0145	LED-6/12W / 700 mA - 4000 K	1296.6	14.5 W	80	1.70
	145-0283+145-0145	LED-6/12W / 700 mA - 2700 K	1407.5	14.5 W	80	1.70

**Optical Accessories**


**Snoot**

Description	Part ID	A	C1
Snoot ET	145-0030	60	120



**Linear spread lens**

Description	Part ID	C1
IO-180-FLC121-LED	145-0050	81



**Flood lens**

**WE-EF LEUCHTEN GmbH**

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0


info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/10/2024

---

Description	Part ID	C1
IO-360-FLC121-LED	145-0142	81

---




---

**Honeycomb louvre**

---

Description	Part ID	C1
IW-FLC121-LED - [EE][EES]	145-0143	81

---



---


**Wallwash lens****WE-EF LEUCHTEN GmbH**

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>


Subject to technical changes and errors. - Generated on 23/10/2024

Description	Part ID	C1
IO-20-WW-FLC121-LED	145-0145	81



**Glare shield**


Description	Part ID	A	C1
Glare shield ES	145-9192	102	119




**Mounting Accessories**

**Pipe clamp SP**

Description	Part ID	D1	Weight (kg)	D
SP1-2/M8 Pole clamp, single (Ø 76-89)	146-0246	76-89	1.20	76-89




SP2-2/M8 Pole clamp, double (Ø 38-60)	146-0247	38-60	1	38-66
---------------------------------------	----------	-------	---	-------






**Projectors**

Description	Part ID	D1	Weight (kg)	D
SP2-2/M8 Pole clamp, double (Ø 76-89)	146-0248	76-89	1.20	76-89



SP1-2/M8 Pole clamp, single (Ø 38-60)	146-0245	38-60	1	38-66
---------------------------------------	----------	-------	---	-------



**Short post EM**


**WE-EF LEUCHTEN GmbH**

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>


Subject to technical changes and errors. - Generated on 23/10/2024

Description	Part ID	D1	D2	H1	M1	Weight (kg)
EM1-2/M8	146-0253	160	130	200	9	1.10




### Ground spike EF

Description	Part ID	H1	Weight (kg)
Ground spike EF1-2/M8	146-0251	270	0.40




Description	Part ID	H1	Weight (kg)
Ground spike EF1-2/M5 for FLC121	145-9196	270	1



### Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (kg)
Planted root ESV4	300-0461	145	130	102	108	400	350	8	7.85

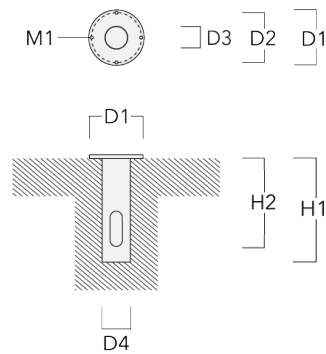

### Junction box JB1


#### WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/10/2024

Description	Part ID	D1	D2	M1	Weight (kg)
JB1 Junction box	310-9000	135	67	9	1.6



**FLC121 LED**

**Projectors**

**WE-EF LEUCHTEN GmbH**

Töpinger Straße 16, 29646 Bispingen, Germany

Phone: +49 5194 909-0

[info@we-ef.com](mailto:info@we-ef.com)

<https://we-ef.com>

Subject to technical changes and errors.

Generated on 23/10/2024