


FLC121 LED POST

Floodlights

we-ef

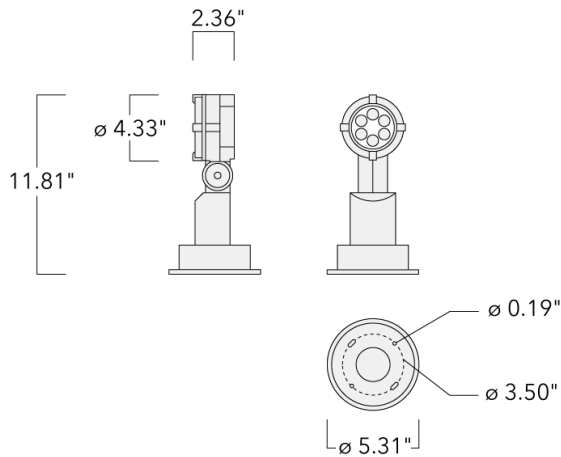

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Knuckle permits 350° horizontal and 90° vertical aiming of optics.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colors | <div> <div></div> <div>RAL9004 Black</div> </div> <div> <div></div> <div>RAL9007 Grey Metallic</div> </div> <div> <div></div> <div>RAL9016 White</div> </div> <div> <div></div> <div>RAL8019 Dark Bronze</div> </div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |
| Windage | 0.025 m ² |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage |
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
| Surge protection | Integral 10kV Surge Protector |

Additional information

| | |
|--------------------------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Other Color Temperatures | 2700K, 3500K, 5000K and True Amber available on request. |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

FLC121 LED POST



Floodlights

Options

Light distribution



symmetric, medium beam [M]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam, 'sharp cut-off'



symmetric, wide beam [W]



symmetric, very narrow beam [VN]



linear spread, very narrow beam [VN]



wallwash

Color temperature



3000 K



4000 K



2700 K







Nominal Watt

16 W

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/14/2025

Configurations

| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|-------------------|-----------------------------|------------------|-------------------|-----|-------------|
| linear spread, very narrow beam [VN]  | 145-0055+145-0050 | LED-6/12W / 700 mA - 3000 K | 1386.3 | 14.5 W | 80 | 3.70 |
| | 145-0056+145-0050 | LED-6/12W / 700 mA - 4000 K | 1481.9 | 14.5 W | 80 | 3.70 |
| | 145-0278+145-0050 | LED-6/12W / 700 mA - 2700 K | 1393.3 | 14.5 W | 80 | 3.75 |
| linear spread, very narrow beam, 'sharp cut-off'  | 145-0034+145-0050 | LED-6/12W / 700 mA - 3000 K | 1526.2 | 14.5 W | 80 | 3.70 |
| | 145-0035+145-0050 | LED-6/12W / 700 mA - 4000 K | 1631.5 | 14.5 W | 80 | 3.70 |
| | 145-0292+145-0050 | LED-6/12W / 700 mA - 2700 K | 1499.6 | 14.5 W | 80 | 3.75 |
| symmetric, medium beam [M]  | 145-0031 | LED-6/12W / 700 mA - 3000 K | 1511.8 | 14.5 W | 80 | 3.70 |
| | 145-0032 | LED-6/12W / 700 mA - 4000 K | 1616.1 | 14.5 W | 80 | 3.70 |
| | 145-0283 | LED-6/12W / 700 mA - 2700 K | 1407.5 | 14.5 W | 80 | 3.75 |
| symmetric, very narrow beam [VN]  | 145-0055 | LED-6/12W / 700 mA - 3000 K | 1496.5 | 14.5 W | 80 | 3.70 |
| | 145-0056 | LED-6/12W / 700 mA - 4000 K | 1599.7 | 14.5 W | 80 | 3.70 |
| | 145-0278 | LED-6/12W / 700 mA - 2700 K | 1393.3 | 14.5 W | 80 | 3.75 |
| symmetric, very narrow beam, 'sharp cut-off' [VNS]  | 145-0034 | LED-6/12W / 700 mA - 3000 K | 1610.7 | 14.5 W | 80 | 3.70 |
| | 145-0035 | LED-6/12W / 700 mA - 4000 K | 1721.8 | 14.5 W | 80 | 3.70 |
| | 145-0292 | LED-6/12W / 700 mA - 2700 K | 1499.6 | 14.5 W | 80 | 3.75 |
| symmetric, wide beam [W]  | 145-0052 | LED-6/12W / 700 mA - 3000 K | 1347.1 | 14.5 W | 80 | 3.70 |
| | 145-0053 | LED-6/12W / 700 mA - 4000 K | 1440 | 14.5 W | 80 | 3.70 |
| | 145-0284 | LED-6/12W / 700 mA - 2700 K | 1254.2 | 14.5 W | 80 | 3.75 |
| wallwash | 145-0031+145-0145 | LED-6/12W / 700 mA - 3000 K | 1213 | 14.5 W | 80 | 3.70 |
| | 145-0032+145-0145 | LED-6/12W / 700 mA - 4000 K | 1296.6 | 14.5 W | 80 | 3.70 |
| | 145-0283+145-0145 | LED-6/12W / 700 mA - 2700 K | 1407.5 | 14.5 W | 80 | 3.75 |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

FLC121 LED POST

Floodlights




| Light distribution | Part ID | Light source | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--------------------|---------|--------------|------------------|-------------------|-----|-------------|
| | | | | | | |

Optical Accessories

Snoot

| Description | Part ID | A | C1 |
|-------------|----------|-------|-------|
| Snoot ET | 145-0030 | 2.36" | 4.72" |




FLC121 LED POST

Floodlights


Linear spread lens

| Description | Part ID | C1 |
|-------------------|----------|-------|
| IO-180-FLC121-LED | 145-0050 | 3.19" |




Softening Lens

| Description | Part ID | C1 |
|-------------------|----------|------|
| IO-360-FLC121-LED | 145-0142 | 3.20 |




Honeycomb louvre

| Description | Part ID | C1 |
|---------------|----------|------|
| IW-FLC121-LED | 145-0143 | 3.20 |




Wallwash lens

| Description | Part ID | C1 |
|---------------------|----------|-------|
| IO-20-WW-FLC121-LED | 145-0145 | 3.19" |



Glare shield


| Description | Part ID | A | C1 |
|-----------------|----------|------|------|
| Glare shield ES | 145-9192 | 4.02 | 4.69 |




Mounting Accessories

Pipe clamp SP

| Description | Part ID | D1 | M1 | Weight (lb) | D |
|---|----------|-------|----|-------------|-------|
| SP1-2/M8 Pipe clamp, single (Ø 3"-3.5") | 146-0246 | 3-3.5 | | 1.20 | 76-89 |




| | | | | | |
|--|----------|-------------|-----|----------|-------|
| SP2-2/M8 Pipe clamp, double (Ø 1.5"-2.36") | 146-0247 | 1.50"-2.36" | .35 | 2.20 lbs | 38-66 |
|--|----------|-------------|-----|----------|-------|




FLC121 LED POST

Floodlights

| Description | Part ID | D1 | M1 | Weight (lb) | D |
|---|----------|-----------|----|-------------|-------|
| SP2-2/M8 Pipe clamp, double (Ø 3"-3.5") | 146-0248 | 3.0"-3.5" | | 2.65 lbs | 76-89 |



| | | | | | |
|--|----------|-------|---|-------|--|
| SP1-2/M8 Pipe clamp, single (Ø 1.5"-2.36") | 146-0245 | 38-60 | 1 | 38-66 | |
|--|----------|-------|---|-------|--|




FLC121 LED POST

Floodlights


Short post EM

| Description | Part ID | D1 | D2 | H1 | M1 | Weight (lb) |
|-------------|----------|-----|------|------|------|-------------|
| EM1-2/M8 | 146-0253 | 6.3 | 5.12 | 7.87 | 0.35 | 3.00 |



Planted root

| Description | Part ID | D1 | D2 | D3 | D4 | H1 | H2 | M1 | Weight (lb) |
|-------------------|----------|------|------|------|------|-------|-------|-----|-------------|
| Planted root ESV4 | 300-0461 | 5.71 | 5.12 | 4.01 | 4.25 | 15.75 | 13.78 | .31 | 15.50 |

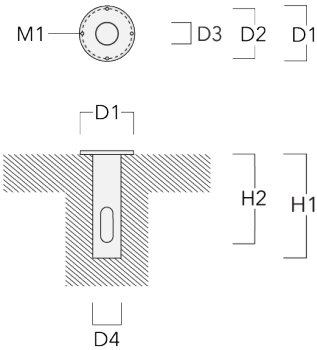

FLC121 LED POST

Floodlights



Junction box JB1

| Description | Part ID | D1 | D2 | M1 | Weight (lb) |
|------------------|----------|------|------|------|-------------|
| JB1 Junction box | 310-9000 | 5.31 | 2.64 | 0.35 | 3.53 |

