


# FLC141 LED POST

## Floodlights

**we-ef**

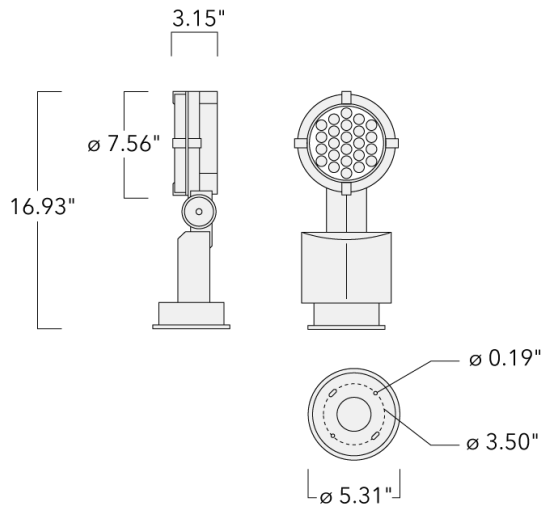

### Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Knuckle permits 350° horizontal and 90° vertical aiming of optics.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black).

+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024





# FLC141 LED POST

## Floodlights

### Specifications

#### Material description

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.057 m <sup>2</sup>

---

#### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	Integral 10kV Surge Protector

---

#### Additional information

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# FLC141 LED POST

## Floodlights

### Options

#### Light distribution



symmetric, medium beam [M]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



symmetric, wide beam [W]



symmetric, very narrow beam [VN]



linear spread, very narrow beam [VN]



linear spread, very narrow beam, 'sharp cut-off'



wallwash

#### Color temperature



3000 K



4000 K



2700 K

#### Nominal Watt

56 W







#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

## Floodlights

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam [VN] 	146-0964+146-0439	LED-24/48W / 700 mA - 2700 K	5162.8	54 W	80	9.70
	146-7064+146-0439	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	9.70
	146-7065+146-0439	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	9.70
linear spread, very narrow beam, 'sharp cut-off' 	146-0872+146-0439	LED-24/48W / 700 mA - 2700 K	5683.9	54 W	80	9.70
	146-7052+146-0439	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	9.70
	146-7053+146-0439	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	9.70
symmetric, medium beam [M] 	146-0965	LED-24/48W / 700 mA - 2700 K	5630.1	54 W	80	9.70
	146-7050	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	9.70
	146-7051	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	9.70
symmetric, very narrow beam [VN] 	146-0964	LED-24/48W / 700 mA - 2700 K	5573.3	54 W	80	9.70
	146-7064	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	9.70
	146-7065	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	9.70
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	146-0872	LED-24/48W / 700 mA - 2700 K	5998.4	54 W	80	9.70
	146-7052	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	9.70
	146-7053	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	9.70
symmetric, wide beam [W] 	146-0963	LED-24/48W / 700 mA - 2700 K	5016.9	54 W	80	9.70
	146-7062	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	9.70
	146-7063	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	9.70
wallwash 	146-0965+146-0646	LED-24/48W / 700 mA - 2700 K	4517.3	54 W	80	9.70
	146-7050+146-0646	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	9.70
	146-7051+146-0646	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	9.70

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

# FLC141 LED POST

## Floodlights



Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
						

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

# FLC141 LED POST

## Floodlights


### Optical Accessories

#### Glare shield

---

Description	Part ID	A	C1
Glare shield ES	146-0229	4.72	5.71

---



---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

# FLC141 LED POST


## Floodlights

### Snoot

---

Description	Part ID	A	C1
Snoot ET	146-0398	4.72	5.70

---




---

### Honeycomb louvre

---

Description	Part ID	C1
IW-FLC141-LED	146-0626	5.70

---



---

#### WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


### Mounting Accessories

#### Pipe clamp SP

Description	Part ID	D1	M1	Weight (lb)	D
SP1-2/M8 Pipe clamp, single (Ø 3"-3.5")	146-0246	3-3.5		1.20	76-89



SP2-2/M8 Pipe clamp, double (Ø 1.5"-2.36")	146-0247	1.50"-2.36"	.35	2.20 lbs	38-66
--	----------	-------------	-----	----------	-------



#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024




# FLC141 LED POST

## Floodlights

Description	Part ID	D1	M1	Weight (lb)	D
SP2-2/M8 Pipe clamp, double (Ø 3"-3.5")	146-0248	3.0"-3.5"		2.65 lbs	76-89



SP1-2/M8 Pipe clamp, single (Ø 1.5"-2.36")	146-0245	38-60	1	38-66
--	----------	-------	---	-------

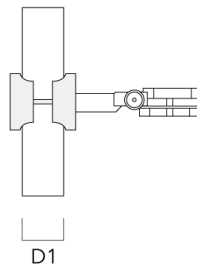

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 11/23/2024

# FLC141 LED POST

## Floodlights


### Short post EM

Description	Part ID	D1	D2	H1	M1	Weight (lb)
EM1-2/M8	146-0253	6.3	5.12	7.87	0.35	3.00



### Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.50

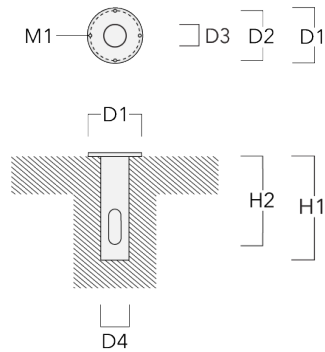

#### WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

## Floodlights

### Junction box JB1

Description	Part ID	D1	D2	M1	Weight (lb)
JB1 Junction box	310-9000	5.31	2.64	0.35	3.53



#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024