


FLC141 LED Surface mounted Projectors

we-ef

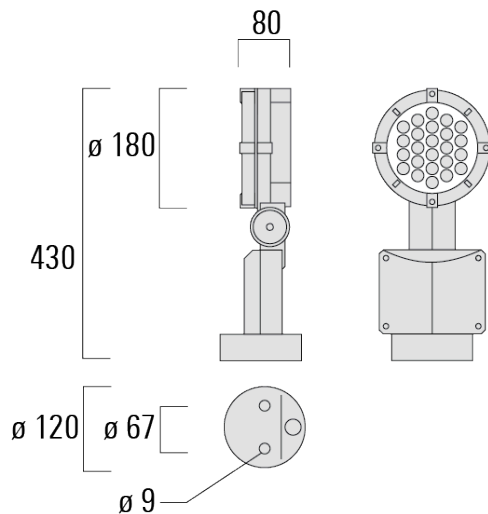

Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Optional 2200 K version available. To be specified at time of ordering.

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29





<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

Projectors

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.057 m ²

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

FLC141 LED Surface mounted

Projectors

we-ef

Options

Light distribution



symmetric, medium beam [M]



symmetric, very narrow beam, sharp cut-off [EES]



symmetric, wide beam [B]



symmetric, very narrow beam [EE]



linear spread, very narrow beam [EE]



linear spread, very narrow beam, sharp cut-off [EES]



wallwash

Colour temperature



3000 K



4000 K










2700 K

Nominal Watt

56 W

Projectors

Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE] 	146-0964+146-0439	LED-24/48W / 700 mA - 2700 K	5162.8	54 W	80	4.40
	146-7064+146-0439	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	4.40
	146-7065+146-0439	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	4.40
linear spread, very narrow beam, sharp cut-off [EES] 	146-0872+146-0439	LED-24/48W / 700 mA - 2700 K	5683.9	54 W	80	4.70
	146-7052+146-0439	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	4.40
	146-7053+146-0439	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	4.40
symmetric, medium beam [M] 	146-0965	LED-24/48W / 700 mA - 2700 K	5630.1	54 W	80	4.40
	146-7050	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	4.40
	146-7051	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	4.40
symmetric, very narrow beam [EE] 	146-0964	LED-24/48W / 700 mA - 2700 K	5573.3	54 W	80	4.40
	146-7064	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	4.40
	146-7065	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	4.40
symmetric, very narrow beam, sharp cut-off [EES] 	146-0872	LED-24/48W / 700 mA - 2700 K	5998.4	54 W	80	4.40
	146-7052	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	4.40
	146-7053	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	4.40
symmetric, wide beam [B] 	146-0963	LED-24/48W / 700 mA - 2700 K	5016.9	54 W	80	4.40
	146-7062	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	4.40
	146-7063	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	4.40
wallwash 	146-0965+146-0646	LED-24/48W / 700 mA - 2700 K	4517.3	54 W	80	4.40
	146-7050+146-0646	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	4.40
	146-7051+146-0646	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	4.40

Projectors

Optical Accessories


Glare shield

Description	Part ID	A	C1
Glare shield ES	146-0229	120	145



Snoot

Description	Part ID	A	C1
Snoot ET	146-0398	120	145



Projectors


Linear louvre

Description	Part ID	C1
Linear louvre IL	146-9056	145



Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	146-0626	145




FLC141 LED Surface mounted Projectors

we-ef

Colour correction filter

Description	Part ID
IF-3000K > 2400K	146-9058



WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29


<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024


Mounting Accessories

Pole clamp

Description	Part ID	D1	Weight (kg)	D
Pole clamp SP1-2/M8, single (Ø 76-89)	146-0246	76-89	1.20	76-89




Pole clamp SP2-2/M8, double (Ø 38-60)	146-0247	38-60	1	38-66
---------------------------------------	----------	-------	---	-------




Projectors

Description	Part ID	D1	Weight (kg)	D
Pole clamp SP2-2/M8, double (Ø 76-89)	146-0248	76-89	1.20	76-89




Pole clamp SP1-2/M8, single (Ø 38-60)	146-0245	38-60	1	38-66
---------------------------------------	----------	-------	---	-------



Projectors


Short post

Description	Part ID	D1	D2	H1	M1	Weight (kg)
Short post EM1-2/M8	146-0253	160	130	200	9	1.10

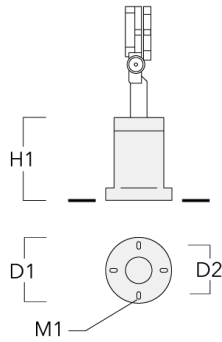

Planted root


Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV4	300-0461-AP	150	130	60	89	400	350	8	200	50 x 100	3.85

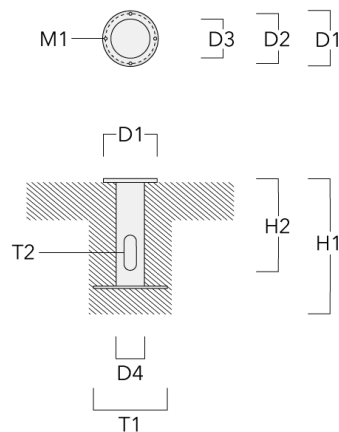


Projectors

Ground spike

Description	Part ID	H1	Weight (kg)
Ground spike EF1 (including cable and plug)	146-0251	270	0.40



Ground spike EF1 (without cable and plug)	146-0250	270	0.40
---	----------	-----	------



FLC141 LED Surface mounted Projectors

we-ef

Junction box

Description	Part ID	D1	D2	M1	Weight (kg)
Junction box JB1	310-9000	135	67	9	1.6

