

# DLO229 LED

Wall luminaires surface mounted


**we-ef**



## Description

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.

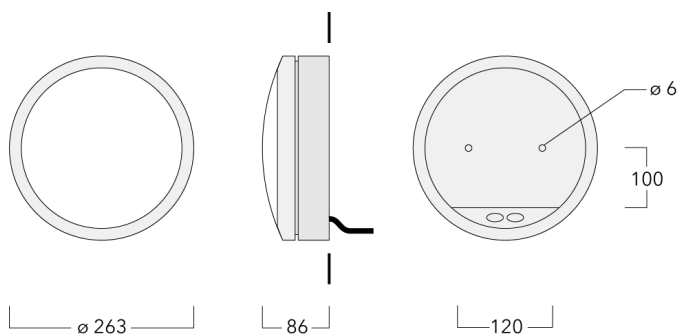

## WE-EF LIGHTING Pty Ltd




6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

**Wall luminaires surface mounted****Specifications****Material description**

---

|                      |   |
|----------------------|---|
| Body                 | Marine-grade, die-cast aluminium alloy  |
| Colours              |  RAL9004 Signal black    |
|                      |  RAL9006 White aluminium |
|                      |  RAL9007 Grey aluminium  |
| Gasket               | Silicone rubber gasket  |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware (unpainted)   |
| Ingress protection   | IP66  |
| Impact resistance    | IK10  |
| Corrosion resistance | 5CE+Primer  |

---

**Electrical description**

---

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |

---

**Additional information**

---

|          |  |
|----------|--|
| Lifetime | Ta=40° L70B50 > 50000h   |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. |

---

# DLO229 LED

Wall luminaires surface mounted

## Options

### Light distribution



diffused distribution

### Colour temperature



3000 K



4000 K



2700 K


### Nominal Watt

15 W

# DLO229 LED

Wall luminaires surface mounted

## Configurations

| Light distribution  | Part ID  | Light source                 | Rated lumens | Rated input power | CRI | Weight (kg) |
|---|----------|------------------------------|--------------|-------------------|-----|-------------|
| diffused distribution<br> | 195-0893 | LED-FT-17W / 500 mA - 2700 K | 1346.8       | 20 W              | 80  | 2.00        |
|   | 195-9521 | LED-FT-17W / 500 mA - 3000 K | 1408.7       | 20 W              | 80  | 2.00        |
|   | 195-9522 | LED-FT-17W / 500 mA - 4000 K | 1468.4       | 20 W              | 80  | 2.00        |