



Description


IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Including terminal box, for mounting on $\varnothing$ 48-60 mm pipes or space frames.

2700 K option available on request.

If ordering a fitting to be installed on an existing rail, please confirm the rail version with your local distributor or our customer excellence team as connectors vary.

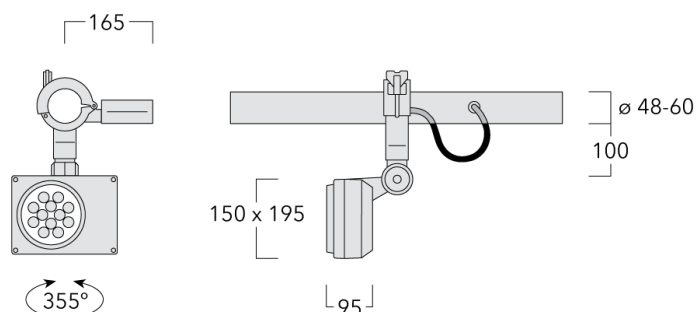

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black
	 RAL9006 White aluminium
	 RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Driver / Ballast	EC electronic converter in thermally-separated compartment
------------------	--

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
----------	--

Options

Light distribution

Colour temperature

Nominal Watt



symmetric, very narrow beam, sharp cut-off [EES]



4000 K

3 W



symmetric, medium beam [M]



3000 K



symmetric, very narrow beam [EE]






symmetric, wide beam [B]



wallwash


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	145-9563	LED-12/24W / 700 mA - 3000 K	2908.1	27 W	80	3.00
	145-9566	LED-12/24W / 700 mA - 4000 K	3108.7	27 W	80	3.00
symmetric, very narrow beam [EE] 	145-9564	LED-12/24W / 700 mA - 3000 K	2786.9	27 W	80	3.00
	145-9567	LED-12/24W / 700 mA - 4000 K	2979.1	27 W	80	3.00
symmetric, very narrow beam, sharp cut-off [EES] 	145-9613	LED-12/24W / 700 mA - 3000 K	2985.8	27 W	80	3.00
	145-9615	LED-12/24W / 700 mA - 4000 K	3191.8	27 W	80	3.00
symmetric, wide beam [B] 	145-9612	LED-12/24W / 700 mA - 3000 K	2296.7	27 W	80	3.00
	145-9614	LED-12/24W / 700 mA - 4000 K	2455	27 W	80	3.00
wallwash 	145-9563+145-9577	LED-12/24W / 700 mA - 3000 K	2284.9	27 W	80	4.00
	145-9566+145-9577	LED-12/24W / 700 mA - 4000 K	2442.4	27 W	80	4.00

Optical Accessories


Optical Adaptor

Description	Part ID	A	C1
External optical adaptor EA	145-9570	70	134



Glare shield


Description	Part ID	A	C1
Glare shield ES	145-9571	70	134



RAIL66


Snoot

Description	Part ID	A	C1
Snoot ET	145-9572	70	134




Linear spread lens

Description	Part ID	C1
EO-180-FLD131-LED	145-9573	130




Surface wash lens

Description	Part ID	C1
EO-360-FLD131-LED	145-9574	130



Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	145-9577	125



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

DALI interface

Description	Part ID	Additional information
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!