




Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Including terminal box, for mounting on ø 48-60 mm pipes or space frames.

2700 K option available on request.

If ordering a fitting to be installed on an existing rail, please confirm the rail version with your local distributor or our customer excellence team as connectors vary.

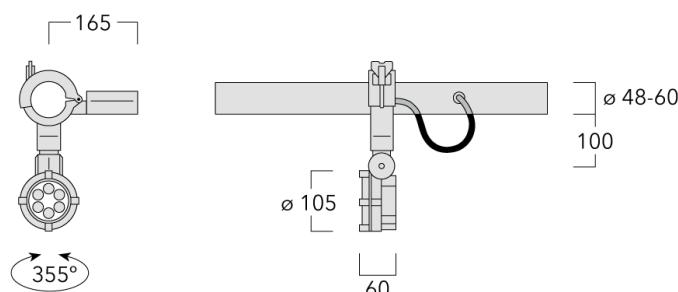

Specifications**Material description**


Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
----------	--

Options**Light distribution**

symmetric, wide beam [B]



symmetric, medium beam [M]



symmetric, very narrow beam [EE]



symmetric, very narrow beam, sharp cut-off [EES]



wallwash [A20]

Colour temperature

3000 K







4000 K

Nominal Watt

16 W


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M]	145-9750	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	2.50
	145-9756	LED-6/12W / 700 mA - 4000 K	1616.1	14.5 W	80	2.50
symmetric, very narrow beam [EE]	145-9751	LED-6/12W / 700 mA - 3000 K	1496.5	14.5 W	80	2.50
	145-9757+145-0145	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	2.50
symmetric, very narrow beam, sharp cut-off [EES]	145-9752	LED-6/12W / 700 mA - 3000 K	1610.7	14.5 W	80	2.50
	145-9758+145-0145	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	2.50
symmetric, wide beam [B]	145-9749	LED-6/12W / 700 mA - 3000 K	1347.1	14.5 W	80	2.50
	145-9755	LED-6/12W / 700 mA - 4000 K	1440	14.5 W	80	2.50
wallwash [A20]	145-9750+145-0145	LED-6/12W / 700 mA - 3000 K	1213	14.5 W	80	2.10
	145-9756+145-0145	LED-6/12W / 700 mA - 4000 K	1296.6	14.5 W	80	2.10

Optical Accessories


Snoot

Description	Part ID	A	C1
Snoot ET	145-0030	60	120




Linear spread lens

Description	Part ID	C1
IO-180-FLC121-LED	145-0050	81



Surface wash lens


Description	Part ID	C1
IO-360-FLC121-LED	145-9390	81



C1

Honeycomb louvre


Description	Part ID	C1
IW-FLC121-LED	145-0143	81



C1

Wallwash lens


Description	Part ID	C1
IO-20-WW-FLC121-LED	145-0145	81



C1

Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9192	102	119



C1

A

Linear louvre

Description	Part ID	C1
Linear louvre LL	145-9171	81



Control**1-10 V analogue dimming interface**

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

DALI interface

Description	Part ID	Additional information
DALI interface	430-0013	<p>DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).</p> <p>Dali 2.0</p> <ul style="list-style-type: none">-Application controllers and Input devices defined-Single-masters and multi-masters allowed-Event priorities defined-Separate addressing & grouping from control gear <p>Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!</p>