

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Ceiling Luminaires

Specifications**Material description**

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE superior corrosion protection system

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



linear spread, very narrow beam



symmetric, very narrow beam, 'sharp cut-off' [VNS]



linear spread, very narrow beam, 'sharp cut-off'



wallwash [A20]



linear spread, medium beam [M]

Color temperature



3000 K









4000 K

Nominal Watt

56 W

Ceiling Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-1398+134-1382	LED-24/48W / 700 mA - 3000 K	5508.3	54 W	80	8.82
	134-1399+134-1382	LED-24/48W / 700 mA - 4000 K	5888.1	54 W	80	8.82
linear spread, very narrow beam, 'sharp cut-off' 	134-1402+134-1382	LED-24/48W / 700 mA - 3000 K	6104.9	54 W	80	8.82
	134-1403+134-1382	LED-24/48W / 700 mA - 4000 K	6526	54 W	80	8.82
linear spread, very narrow beam 	134-1400+134-1382	LED-24/48W / 700 mA - 3000 K	5545.2	54 W	80	8.82
	134-1401+134-1382	LED-24/48W / 700 mA - 4000 K	5927.6	54 W	80	8.82
symmetric, medium beam [M] 	134-1398	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	8.82
	134-1399	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	8.82
symmetric, very narrow beam [VN] 	134-1400+134-1382	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	8.82
	134-1401	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	8.82
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-1402	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	8.82
	134-1403	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	8.82
symmetric, wide beam [W] 	134-1396	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	8.82
	134-1397	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	8.82


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/06/2026


Ceiling Luminaires

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
						
wallwash [A20]	134-1398+134-1492	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	8.82
						
	134-1399+134-1492	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	8.82

Mounting Accessories

Installation blackout


Description	Part ID	A	B	C1	C
Installation blackout BD024-I	134-0798	19.96"	12"	11.22"	270

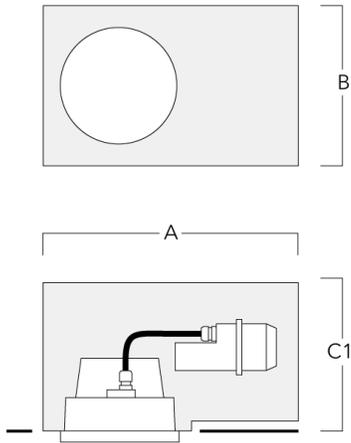

Optical Accessories

Softening Lens

Description	Part ID	C1
IO-360-DAC/DOC240-LED	134-1441	7.52



Ceiling Luminaires


Honeycomb louvre

Description	Part ID	C1
IW-DOC24_LED	134-1445	7.52



Wallwash lens

Description	Part ID	C1
IO-20-WW-DAC/DOC240-LED	134-1492	7.52



Ceiling Luminaires

Linear spread lens

Description	Part ID	C1
IO-180-DAC/DOC240-LED	134-1382	7.52

