


FLC122 LED

Wall luminaires surface mounted

we-ef

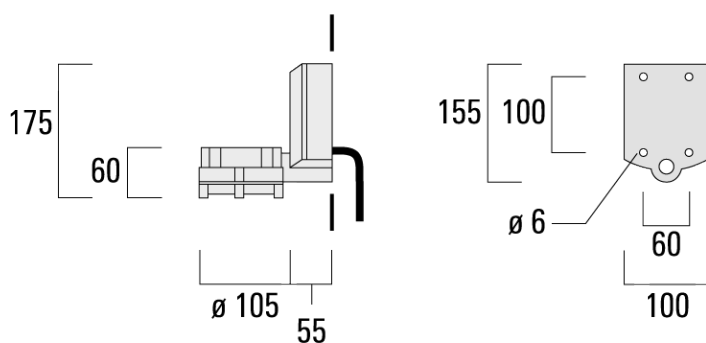

Description

IP55. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

2700 K option available on request.




WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 16/08/2025

Specifications**Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black
	 RAL9006 White aluminium
	 RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP55
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
----------	--

FLC122 LED



Wall luminaires surface mounted

Options

Light distribution

Colour temperature

Nominal Watt



symmetric, medium beam [M]



symmetric, very narrow beam [EE]



symmetric, very narrow beam, sharp cut-off [EES]



symmetric, wide beam [B]







3000 K



4000 K

16 W


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	145-9374	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	0.00
	145-9377	LED-6/12W / 700 mA - 4000 K	1616.1	14.5 W	80	0.00
symmetric, very narrow beam [EE] 	145-9375	LED-6/12W / 700 mA - 3000 K	1496.5	14.5 W	80	0.00
	145-9378	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	0.00
symmetric, very narrow beam, sharp cut-off [EES] 	145-9382	LED-6/12W / 700 mA - 3000 K	1610.7	14.5 W	80	0.00
	145-9384	LED-6/12W / 700 mA - 4000 K	1721.8	14.5 W	80	0.00
symmetric, wide beam [B] 	145-9383	LED-6/12W / 700 mA - 3000 K	1347.1	14.5 W	80	0.00
	145-9385	LED-6/12W / 700 mA - 4000 K	1440	14.5 W	80	0.00

Optical Accessories

Snoot

Description	Part ID	A	C1
Snoot ET	145-0030	60	120



Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9192	102	119

