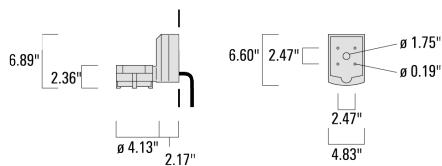


Surface Mounted Wall Luminaires

**Description**

IP55. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Surface Mounted Wall Luminaires

Specifications

Material description

Body	Luminaire body and lens frame constructed in die-cast aluminum.
Lens	Clear tempered glass lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral driver in thermally separated compartment.

Additional information

Ambient Temperature	Ta less than 25 deg C.
Listings	ETL listed. Suitable for wet locations.

Surface Mounted Wall Luminaires

Options

Light distribution



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



symmetric, wide beam [W]

Color temperature



3000 K







4000 K

Nominal Watt

16 W


Surface Mounted Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	145-9374	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	3.50
	145-9377	LED-6/12W / 700 mA - 4000 K	1616.1	14.5 W	80	3.50
symmetric, very narrow beam [VN] 	145-9375	LED-6/12W / 700 mA - 3000 K	1496.5	14.5 W	80	3.50
	145-9378	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	3.50
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	145-9382	LED-6/12W / 700 mA - 3000 K	1610.7	14.5 W	80	3.50
	145-9384	LED-6/12W / 700 mA - 4000 K	1721.8	14.5 W	80	3.50
symmetric, wide beam [W] 	145-9383	LED-6/12W / 700 mA - 3000 K	1347.1	14.5 W	80	3.50
	145-9385	LED-6/12W / 700 mA - 4000 K	1440	14.5 W	80	3.50

Surface Mounted Wall Luminaires**Optical Accessories****Snoot**

Description	Part ID	A	C1
Snoot ET	145-0030	2.36"	4.72"



Surface Mounted Wall Luminaires**Glare shield**

Description	Part ID	A	C1
Glare shield ES	145-9192	4.02	4.69

