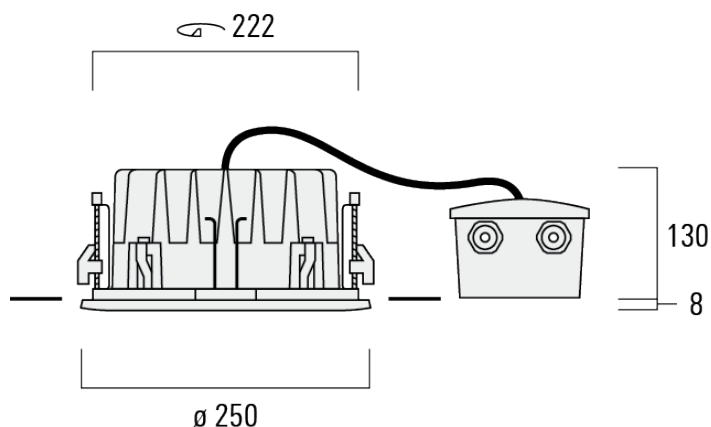




Description

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.



Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

Additional information

Options

Light distribution



symmetric, wide beam [B]



symmetric, medium beam [M]



symmetric, very narrow beam [EE]



symmetric, very narrow beam, sharp cut-off [EES]

Colour temperature



3000 K







4000 K

Nominal Watt

56 W

0 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	135-9103	LED-24/48W / 700 mA - 3000 K	5816.3	54 W	80	5.00
	135-9108	LED-24/48W / 700 mA - 4000 K	6217.4	54 W	80	5.00
	135-9119	LED-24/72W / 1050 mA - 3000 K	8668.8	79 W	80	5.20
	135-9122	LED-24/72W / 1050 mA - 4000 K	9072	79 W	80	5.20
symmetric, very narrow beam [EE] 	135-9104	LED-24/48W / 700 mA - 3000 K	5573.8	54 W	80	5.00
	135-9109	LED-24/48W / 700 mA - 4000 K	5958.2	54 W	80	5.00
	135-9120	LED-24/72W / 1050 mA - 3000 K	8662.6	79 W	80	5.20
	135-9123	LED-24/72W / 1050 mA - 4000 K	9065.5	79 W	80	5.20
symmetric, very narrow beam, sharp cut-off [EES] 	135-9105	LED-24/48W / 700 mA - 3000 K	5971.7	54 W	80	5.00
	135-9110	LED-24/48W / 700 mA - 4000 K	6383.5	54 W	80	5.00
symmetric, wide beam [B] 	135-9102	LED-24/48W / 700 mA - 3000 K	4593.3	54 W	80	5.00
	135-9107	LED-24/48W / 700 mA - 4000 K	4910.1	54 W	80	5.00
	135-9118	LED-24/72W / 1050 mA - 3000 K	8075.4	79 W	80	5.20
	135-9121	LED-24/72W / 1050 mA - 4000 K	8451	79 W	80	5.20

Control

DALI interface

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1
Installation blackout BCR140-I	135-9115	385	315	167

