

DOC240 LED Stainless Steel

Ceiling Luminaires

we-ef



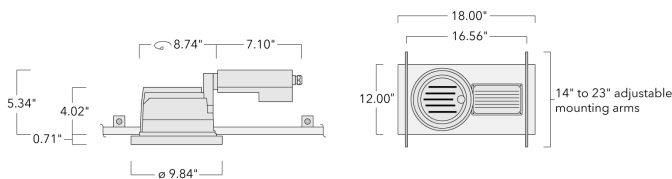
Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/14/2025


DOC240 LED Stainless Steel



Ceiling Luminaires

Specifications

Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.







DOC240 LED Stainless Steel

Ceiling Luminaires





Options

Light distribution

-  symmetric, very narrow beam, 'sharp cut-off' [VNS]
-  symmetric, very narrow beam [VN]
-  symmetric, medium beam [M]
-  symmetric, wide beam [W]
-  wallwash
-  linear spread, medium beam [M]

Color temperature







-  3000 K
-  4000K

Nominal Watt

56 W

Ceiling Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-6300+134-1382	LED-24/48W / 700 mA - 3000 K	5508.3	54 W	80	8.10
	134-6301+134-1382	LED-24/48W / 700 mA - 4000 K	5888.1	54 W	80	8.10
symmetric, medium beam [M] 	134-6300	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	8.10
	134-6301	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	8.10
symmetric, very narrow beam [VN] 	134-6303	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	8.10
	134-6304+134-1492	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	8.10
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-6306	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	8.10
	134-6307	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	8.10
symmetric, wide beam [W] 	134-6309	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	8.10
	134-6310	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	8.10
wallwash 	134-6300+134-1492	LED-24/48W / 700 mA - 3000 K	5186.6	54 W	80	8.10
	134-6301+134-1492	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	8.10

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

DOC240 LED Stainless Steel

Ceiling Luminaires



Optical Accessories

Honeycomb louvre

Description	Part ID	C1
IW-DOC24_LED	134-1445	7.52




DOC240 LED Stainless Steel
Ceiling Luminaires



Wallwash lens

Description	Part ID	C1
IO-20-WW-DAC/DOC240-LED	134-1492	7.52



Linear spread lens

Description	Part ID	C1
IO-180-DAC/DOC240-LED	134-1382	7.52

