




Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

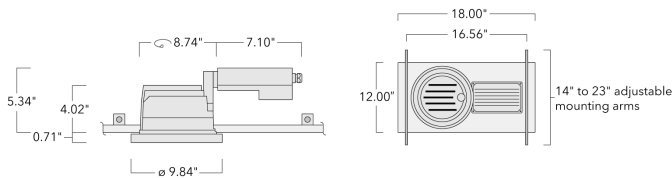Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)



Ceiling Luminaires

Specifications
Material description

Body	Luminaire body constructed in die cast aluminum.
Lens	Clear tempered glass lens.
Colors	<div></div> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Options

Light distribution



symmetric, very narrow beam, 'sharp cut-off' [VNS]



symmetric, very narrow beam [VN]



symmetric, medium beam [M]



symmetric, wide beam [W]



wallwash



linear spread, medium beam [M]

Color temperature



3000 K









4000K

Nominal Watt

56 W

Ceiling Luminaires


Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-6300+134-1382	LED-24/48W / 700 mA - 3000 K	5508.3	54 W	80	8.10
	134-6301+134-1382	LED-24/48W / 700 mA - 4000 K	5888.1	54 W	80	8.10
symmetric, medium beam [M] 	134-6300	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	8.10
	134-6301	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	8.10
symmetric, very narrow beam [VN] 	134-6303	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	8.10
	134-6304+134-1492	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	8.10
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-6306	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	8.10
	134-6307	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	8.10
symmetric, wide beam [W] 	134-6309	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	8.10
	134-6310	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	8.10
wallwash 	134-6300+134-1492	LED-24/48W / 700 mA - 3000 K	5186.6	54 W	80	8.10
	134-6301+134-1492	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	8.10

Optical Accessories

Honeycomb louvre

Description	Part ID	C1
IW-DOC24_LED	134-1445	7.52



Ceiling Luminaires

Wallwash lens

Description	Part ID	C1
IO-20-WW-DAC/DOC240-LED	134-1492	7.52



Linear spread lens

Description	Part ID	C1
IO-180-DAC/DOC240-LED	134-1382	7.52

