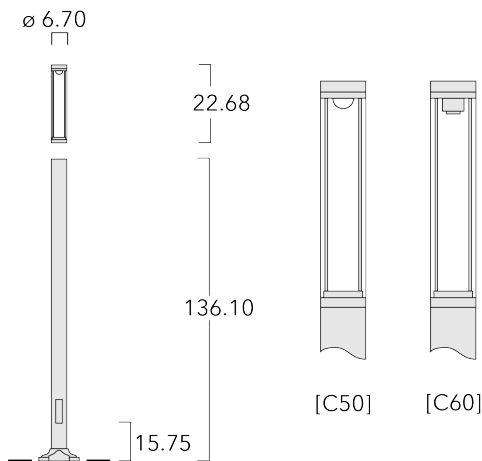


LTM440 LED-FT

Light Columns



Description

IP66. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate outer lens. Service door with fused cable connecting box. CAD-optimized indirect optics for superior illumination and glare control. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)





WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Light Columns**Specifications****Material description**

Body	Luminaire head, base plate and base plate cover constructed in die cast aluminum
Lens	Clear polycarbonate lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] LED driver in 120-277V
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=25°/40° L70B50 > 50000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

LTM440 LED-FT

Light Columns



Options

Light distribution



symmetric distribution [C60]



[C50] Type V Short

Color temperature



3000 K



4000 K



2700 K

Nominal Watt

24 W

36 W



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Light Columns

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
[C50] Type V Short 	115-1521	LED-FT-17W (3000K)	2508.1	20 W	80	55.10
	115-1522	LED-FT-17W (4000K)	2614.3	20 W	80	55.10
	115-1523	LED-FT-24W (3000K)	3447.6	27 W	80	55.10
	115-1565	LED-FT-37W (3000K)	5171.3	42 W	80	55.10
	115-1566	LED-FT-37W (4000K)	5469.5	42 W	80	55.10
	115-1778	LED-FT-17W (2700K)	2397.8	20 W	80	55.10
	115-1779	LED-FT-24W (2700K)	3308.7	27 W	80	55.10
	115-1837	LED-FT-37W (2700K)	5020.2	42 W	80	55.10
symmetric distribution [C60] 	115-1517	LED-FT-17W (3000K)	2071.2	20 W	80	55.10
	115-1518	LED-FT-17W (4000K)	2158.9	20 W	80	55.10
	115-1519	LED-FT-24W (3000K)	2847	27 W	80	55.10
	115-1520	LED-FT-24W (4000K)	2968.4	27 W	80	55.10
	115-1780	LED-FT-17W (2700K)	1980.1	20 W	80	55.10
	115-1781	LED-FT-24W (2700K)	2732.3	27 W	80	55.10
	115-1838	LED-FT-37W (2700K)	4145.7	42 W	80	55.10

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

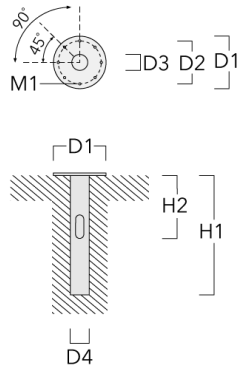
customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV10	300-0949	16.34	13.39	4.96	5.24	39.37	19.69	0.71	55.78



LTM440 LED-FT

Light Columns



Optical Accessories

Light shield

Description	Part ID
LS180-[C60]	159-0321

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

LTM440 LED-FT

Light Columns

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086

Phone: +1 724 742 0030

customersupport.usa@we-ef.com

<https://we-ef.com/us>

Subject to technical changes and errors.

Generated on 10/23/2024