


# LTM440 LED-FT

## Light columns

**we-ef**

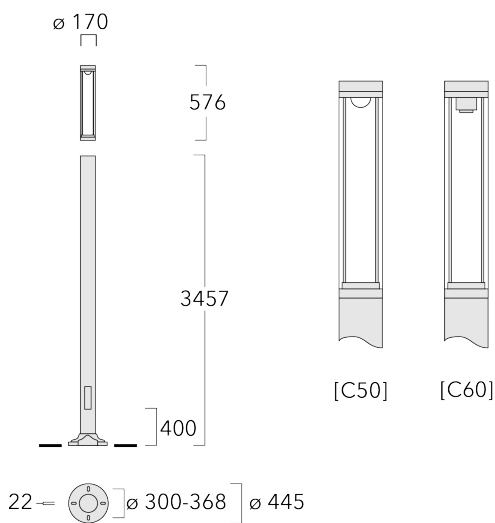

### Description

IP66, Class I. IK10. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG<sup>®</sup> Controlled Compression Gasket. Polycarbonate main lens. CAD-optimised optics for superior illumination and glare control.





Service door with fused cable connecting box.

## Light columns

### Specifications

#### Material description

---

Body	Marine-grade, all-aluminium construction
Colours	 RAL9004 Signal black
	 RAL9007 Grey aluminium
	 RAL7016 Anthracite grey
	 RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

---

#### Electrical description

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

---

#### Additional information

---

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

---

# LTM440 LED-FT

Light columns

**we-ef**

## Options

Light distribution   Colour temperature   Nominal Watt

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

# LTM440 LED-FT

## Light columns



### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
--------------------	---------	--------------	--------------	-------------------	-----	-------------

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

# LTM440 LED-FT

## Light columns



## Optical Accessories

### Light shield

Description	Part ID
LS180-[C60]	159-0321