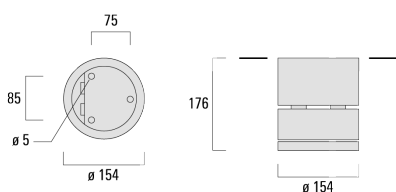


DAC220 LED

Ceiling luminaires

we-ef



Description

IP65, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC_R_One LED Concept. Factory installed LED circuit board.

2700 K option available on request.





WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

Specifications**Material description**

Body	Marine-grade die-cast aluminium alloy
Colours	 RAL9004 Signal black
	 RAL9006 White aluminium
	 RAL9007 Grey aluminium
	 RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP65
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

DAC220 LED

Ceiling luminaires

we-ef

Options

Light distribution



symmetric, wide beam [B]



symmetric, medium beam [M]



symmetric, very narrow beam [EE]



symmetric, very narrow beam, sharp cut-off [EES]



wallwash [A20]



linear spread, very narrow beam [EE]



linear spread, very narrow beam, sharp cut-off [EES]

Colour temperature



3000 K



4000 K










2700 K

Nominal Watt

3 W

29 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
linear spread, very narrow beam [EE] 	134-1426+134-1381	LED-12/24W / 700 mA - 3000 K	2744.2	27 W	80	3.00
	134-1430+134-1381	LED-12/24W / 700 mA - 4000 K	2933.4	27 W	80	3.00
	134-1951+134-1381	LED-12/24W / 700 mA - 2700 K	2554.9	27 W	80	2.90
linear spread, very narrow beam, sharp cut-off [EES] 	134-1427+134-1381	LED-12/24W / 700 mA - 3000 K	2865.9	27 W	80	3.00
	134-1431+134-1381	LED-12/24W / 700 mA - 4000 K	3063.5	27 W	80	3.00
	134-1952+134-1381	LED-12/24W / 700 mA - 2700 K	2668.2	27 W	80	2.90
symmetric, medium beam [M] 	134-1425+134-1382	LED-12/24W / 700 mA - 3000 K	2998.6	27 W	80	2.90
	134-1429	LED-12/24W / 700 mA - 4000 K	3205.4	27 W	80	2.90
	134-1950	LED-12/24W / 700 mA - 2700 K	2791.8	27 W	80	2.90
symmetric, very narrow beam [EE] 	134-1426	LED-12/24W / 700 mA - 3000 K	2883.7	27 W	80	2.90
	134-1430+134-1382	LED-12/24W / 700 mA - 4000 K	3082.5	27 W	80	2.90
	134-1951	LED-12/24W / 700 mA - 2700 K	2684.8	27 W	80	2.90
symmetric, very narrow beam, sharp cut-off [EES] 	134-1427	LED-12/24W / 700 mA - 3000 K	3077.9	27 W	80	2.90
	134-1431	LED-12/24W / 700 mA - 4000 K	3290.2	27 W	80	2.90
	134-1952	LED-12/24W / 700 mA - 2700 K	2865.6	27 W	80	2.90
symmetric, wide beam [B] 	134-1424	LED-12/24W / 700 mA - 3000 K	2709.2	27 W	80	2.90
	134-1428	LED-12/24W / 700 mA - 4000 K	2896	27 W	80	2.90
	134-1949	LED-12/24W / 700 mA - 2700 K	2522.3	27 W	80	2.90
wallwash [A20] 	134-1425+134-1491	LED-12/24W / 700 mA - 3000 K	2405.6	27 W	80	3.00
	134-1429+134-1491	LED-12/24W / 700 mA - 4000 K	2571.5	27 W	80	3.00
	134-1950+134-1491	LED-12/24W / 700 mA - 2700 K	2239.7	27 W	80	2.90

DAC220 LED

Ceiling luminaires



Control

DALI interface

Description	Part ID	C
DALI interface	430-0013	90

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024