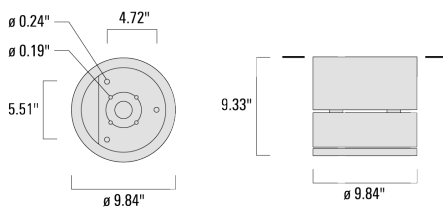


DAC240 LED

Ceiling Luminaires

we-ef



Description

IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation over recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC





410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

DAC240 LED

Ceiling Luminaires

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens, hinged
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP65
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

DAC240 LED

Ceiling Luminaires

we-ef

Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



wallwash [A20]



linear spread, medium beam [M]

Color temperature



3000 K



4000 K

Nominal Watt

56 W







WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-1433+134-1382	LED-24/48W / 700 mA - 3000 K	5508.3	54 W	80	16.80
	134-1437+134-1382	LED-24/48W / 700 mA - 4000 K	5888.1	54 W	80	16.80
symmetric, medium beam [M] 	134-1433	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	16.80
	134-1437	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	16.80
symmetric, very narrow beam [VN] 	134-1434	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	16.80
	134-1438	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	16.80
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-1435+134-1382	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	16.80
	134-1439	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	16.80
symmetric, wide beam [W] 	134-1432	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	16.80
	134-1436+134-1382	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	16.80
wallwash [A20] 	134-1433+134-1492	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	16.80
	134-1437+134-1492	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	16.80

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024


DAC240 LED

Ceiling Luminaires

Optical Accessories

Honeycomb louvre

Description	Part ID	C1
IW-DOC24_LED	134-1445	7.52



C1

WE-EF LIGHTING USA, LLC


410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024

DAC240 LED

Ceiling Luminaires


Wallwash lens

Description	Part ID	C1
IO-20-WW-DAC/DOC240-LED	134-1492	7.52



Linear spread lens

Description	Part ID	C1
IO-180-DAC/DOC240-LED	134-1382	7.52



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 11/23/2024