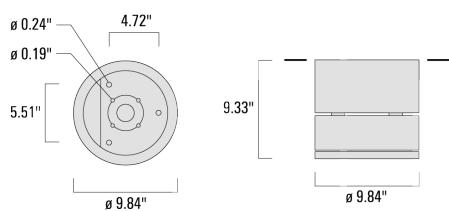


Ceiling Luminaires**Description**

IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation over recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Ceiling Luminaires**Specifications****Material description**

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens, hinged

Colors

	RAL9004 Black
	RAL9007 Grey Metallic
	RAL9016 White
	RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP65

Impact resistance IK07

Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter in thermally-separated compartment

Additional information

Lifetime $T_a=25^\circ/40^\circ$ L90B10 > 90000h

Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Ceiling Luminaires**Options****Light distribution**

symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



wallwash [A20]



linear spread, medium beam [M]

Color temperature

3000 K








4000K

Nominal Watt

56 W


Ceiling Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, medium beam [M] 	134-1433+134-1382	LED-24/48W / 700 mA - 3000 K	5508.3	54 W	80	16.80
	134-1437+134-1382	LED-24/48W / 700 mA - 4000 K	5888.1	54 W	80	16.80
symmetric, medium beam [M] 	134-1433	LED-24/48W / 700 mA - 3000 K	6047.2	54 W	80	16.80
	134-1437	LED-24/48W / 700 mA - 4000 K	6464.2	54 W	80	16.80
symmetric, very narrow beam [VN] 	134-1434	LED-24/48W / 700 mA - 3000 K	5986.1	54 W	80	16.80
	134-1438	LED-24/48W / 700 mA - 4000 K	6398.9	54 W	80	16.80
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	134-1435+134-1382	LED-24/48W / 700 mA - 3000 K	6442.7	54 W	80	16.80
	134-1439	LED-24/48W / 700 mA - 4000 K	6887	54 W	80	16.80
symmetric, wide beam [W] 	134-1432	LED-24/48W / 700 mA - 3000 K	5388.5	54 W	80	16.80
	134-1436+134-1382	LED-24/48W / 700 mA - 4000 K	5760.1	54 W	80	16.80
wallwash [A20] 	134-1433+134-1492	LED-24/48W / 700 mA - 3000 K	4851.9	54 W	80	16.80
	134-1437+134-1492	LED-24/48W / 700 mA - 4000 K	5186.6	54 W	80	16.80


Ceiling Luminaires**Optical Accessories****Softening Lens**

Description	Part ID	C1
IO-360-DAC/DOC240-LED	134-1441	7.52



Ceiling Luminaires**Honeycomb louvre**


Description	Part ID	C1
IW-DOC24_LED	134-1445	7.52



— C1 —

Wallwash lens


Description	Part ID	C1
IO-20-WW-DAC/DOC240-LED	134-1492	7.52



— C1 —

Ceiling Luminaires**Linear spread lens**

Description	Part ID	C1
IO-180-DAC/DOC240-LED	134-1382	7.52



— C1 —