

Description

IP68. 12 V/Class III. IK09. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens. Luminaire can be driven over at low speed. Anti-wick technology, equipped with a cable gland and 1.5 meters of flexible, PVC-free cable. IP68 in-line connector facilitates easy removal for off-site lamp replacement.

Factory installed circuit board with High Efficiency LEDs in either white, red, green, blue or RGB. Mains converter required, to be ordered separately.

Luminaire installation blackout and sealable junction box included in supply.

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens with opal diffuser, max. load 5 tonnes
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP68
Impact resistance	IK09

Electrical description


Driver / Ballast	[ON-OFF]
------------------	----------

Additional information

Options

Light distribution	Colour temperature	Nominal Watt
 symmetric, diffused distribution	white	1 W
		2 W
	red	
	green	
	blue	
	RGB	


Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, diffused distribution 	185-9557	LED-4/0,5W - white	3.5	0.8 W	85	0.54
	185-9558	LED-4/0,5W - red	2.9	0.8 W	22	0.54
	185-9559	LED-4/0,5W - green	2	0.8 W	22	0.54
	185-9560	LED-4/0,5W - blue	0.8	0.8 W	22	0.54
	185-9562	LED-3 x 4/1,5W - red-green-blue	3.5	0.8 W	22	0.54

Mounting Accessories

Installation cover


Description	Part ID	C1
Installation cover BE	185-1850	65



Electrical Accessories

Main converter

Description	Part ID	A	B	C1
Transformer DC 12 V/12 W	400-0302	89	59	54

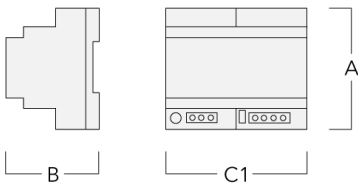

Transformer DC 12 V/48 W	400-0309	89	59	72
--------------------------	----------	----	----	----

