


DLG239 LED

Wall luminaires surface mounted



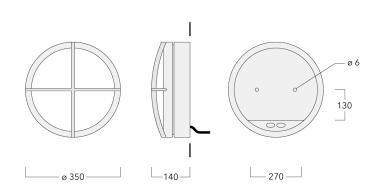

Description

IP66, Class I. IK10. Marine-grade die-cast aluminium alloy.5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.



. ..

- •

Wall luminaires surface mounted

we-ef

Body	Marine-grade die-cast aluminium alloy					
Lens	Polycarbonate lens					
Colours	RAL9004 Signal black					
	RAL9006 White aluminium					
	RAL9007 Grey aluminium					
Gasket	Silicone rubber gasket					
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)					
Ingress protection	IP66					
Impact resistance	IK10					
Corrosion resistance	5CE+Primer					

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=40° L70B50 > 50000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.



DLG239 LED

Wall luminaires surface mounted



Options Light distribution

Light distribution	Colour temperature	Nominal Watt
+ diffused distribution	3000 K	27 W
	4000 K	
	2700 K	

DLG239 LED

Wall luminaires surface mounted

we-ef

Configurations

Light distribution	Part ID	Light source	Rated	Rated input	CRI	Weight (kg)
			lumens	power		
diffused distribution	195-0896	LED-FT-28W / 800 mA - 2700 K	1457.7	31 W	80	3.60
	195-9539	LED-FT-28W / 800 mA - 3000 K	1518.3	31 W	80	3.60
+	195-9540	LED-FT-28W / 800 mA - 4000 K	1585.3	31 W	80	3.60