
we-ef

Wall luminaires surface mounted



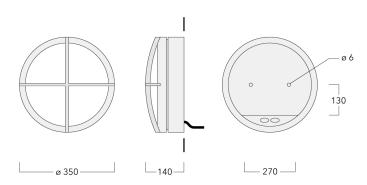

Description

IP66, Class I. IK10. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.



Wall luminaires surface mounted

Specifications

Material description

Body Marine-grade die-cast aluminium alloy

Lens Polycarbonate lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK10

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime $Ta=40^{\circ} L70B50 > 50000h$ Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement

located on www.we-ef.com for further details.



Nominal Watt

27 W

Wall luminaires surface mounted

Options Light distribution



WE-EF LIGHTING Pty Ltd



Wall luminaires surface mounted

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
diffused distribution	195-0896	LED-FT-28W / 800 mA - 2700 K	1457.7	31 W	80	3.60
	195-9539	LED-FT-28W / 800 mA - 3000 K	1518.3	31 W	80	3.60
	195-9540	LED-FT-28W / 800 mA - 4000 K	1585.3	31 W	80	3.60



Wall luminaires surface mounted

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria Phone: +61 3 8587 0444 Fax: +61 3 8587 0499 info.australia@we-ef.com https://we-ef.com/aus

Subject to technical changes and errors. Generated on 23/10/2024

