

DLG239 LED


Wall luminaires surface mounted

we-ef



Description

IP66, Class I. IK10. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.

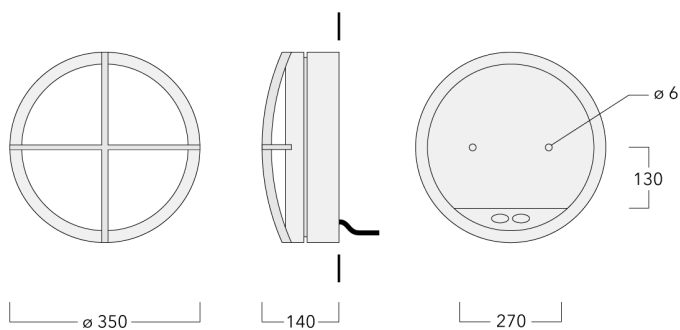




WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499
info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 18/07/2025

Specifications**Material description**

| | |
|----------------------|---|
| Body | Marine-grade die-cast aluminium alloy |
| Lens | Polycarbonate lens |
| Colours |  RAL9004 Signal black |
| |  RAL9006 White aluminium |
| |  RAL9007 Grey aluminium |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP66 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter |

Additional information





| | |
|----------|--|
| Lifetime | Ta=40° L70B50 > 50000h |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

DLG239 LED



Wall luminaires surface mounted

Options


| Light distribution | Colour temperature | Nominal Watt |
|--|--|--------------|
|  diffused distribution |  3000 K | 27 W |
| |  4000 K | |
| |  2700 K | |

DLG239 LED

Wall luminaires surface mounted

we-ef

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI | Weight (kg) |
|---|----------|------------------------------|--------------|-------------------|-----|-------------|
| diffused distribution  | 195-0896 | LED-FT-28W / 800 mA - 2700 K | 1457.7 | 31 W | 80 | 3.60 |
| | 195-9539 | LED-FT-28W / 800 mA - 3000 K | 1518.3 | 31 W | 80 | 3.60 |
| | 195-9540 | LED-FT-28W / 800 mA - 4000 K | 1585.3 | 31 W | 80 | 3.60 |

WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499
info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 18/07/2025