


#### Wall luminaires surface mounted



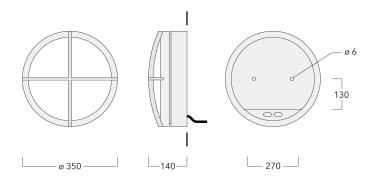

#### **Description**

IP66, Class I. IK10. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries.

#### Wall luminaires surface mounted

# **Specifications Material description**

Body Marine-grade die-cast aluminium alloy

Lens Polycarbonate lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK10

Corrosion resistance 5CE+Primer

#### **Electrical description**

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

#### Additional information

Lifetime Ta=40° L70B50 > 50000h

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement

located on www.we-ef.com for further details.

#### Wall luminaires surface mounted

## **Options**

#### **Light distribution Colour temperature Nominal Watt** 27 W 3000 K diffused distribution 4000 K

2700 K

#### **DLG239 LED**



#### Wall luminaires surface mounted

### **Configurations**

Light distribution	Part ID	Light source	Rated	Rated input	CRI	Weight (kg)
			lumens	power		
diffused distribution	195-0896	LED-FT-28W / 800 mA - 2700 K	1457.7	31 W	80	3.60
	195-9539	LED-FT-28W / 800 mA - 3000 K	1518.3	31 W	80	3.60
+	195-9540	LED-FT-28W / 800 mA - 4000 K	1585.3	31 W	80	3.60