


# DLB239 LED

## Wall luminaires surface mounted

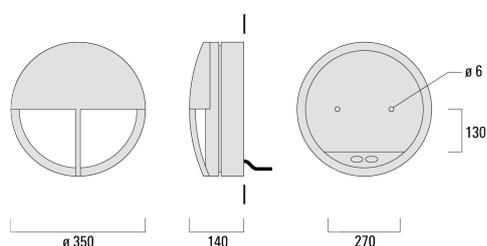

### Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.

**Wall luminaires surface mounted**

---

**Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

---

**Additional information**

---

Lifetime	T <sub>a</sub> =25° L70B50 > 50000h
----------	-------------------------------------

---

# DLB239 LED

## Wall luminaires surface mounted

---

### Options

#### Light distribution



diffused distribution

#### Colour temperature



3000 K



4000 K




2700 K

#### Nominal Watt

27 W

0 W

**Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
diffused distribution 	195-9545	LED-FT-28W / 800 mA - 3000 K	1198.1	31 W	80	3.90
	195-9546	LED-FT-28W / 800 mA - 4000 K	1250.9	31 W	80	3.90
	195-9560	LED-FT-28W / 800 mA - 2700 K	1150.2	31 W	80	3.90