


XLO239 LED

Wall luminaires surface mounted



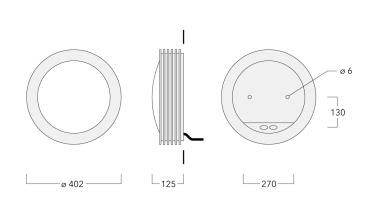

Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.



Wall luminaires surface mounted



Specifications Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	RAL9004 Signal black RAL9006 White aluminium RAL9007 Grey aluminium
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.



XLO239 LED

Wall luminaires surface mounted

Options

Light distribution Colour temperature Nominal Watt

info.australia@we-ef.com - https://we-ef.com/aus

Subject to technical changes and errors. - Generated on 23/11/2024





XLO239 LED

Wall luminaires surface mounted



Configurations

Light distribution	Part ID	Light source	Rated	Rated input	CRI	Weight (kg)
			lumens	power		