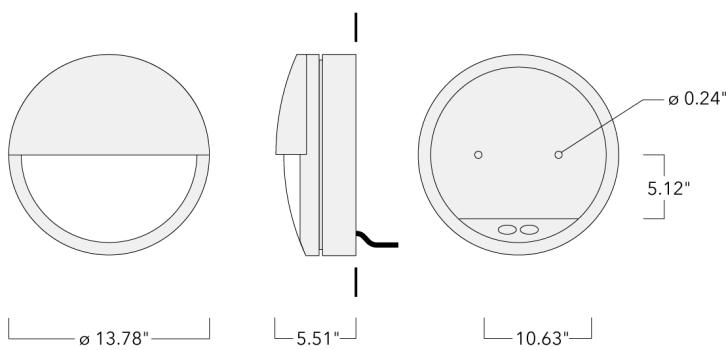


**Surface Mounted Wall Luminaires****Description**

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Integral driver. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.  
Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

**Surface Mounted Wall Luminaires****Specifications****Material description**

---

|                      |  |
|----------------------|--|
| Body                 | Luminaire body and lens frame constructed in die cast aluminum.  |
| Lens                 | Opal polycarbonate lens.   |
| Colors               |  RAL9004 Black<br> RAL9007 Grey Metallic<br> RAL9016 White<br> RAL8019 Dark Bronze |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS polymer coated stainless steel   |
| Ingress protection   | IP55   |
| Impact resistance    | IK10   |
| Corrosion resistance | 5CE  |

---

**Electrical description**

---

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |

---

**Additional information**

---

|          |  |
|----------|--|
| Lifetime | Ta=25°/40° L70B50 > 50000h                                 |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

---

**Surface Mounted Wall Luminaires****Options****Light distribution****Color temperature****Nominal Watt**

diffused distribution



3000 K

27 W




4000 K



2700 K

**Surface Mounted Wall Luminaires****Configurations**

| Light distribution   | Part ID  | Light source                 | Delivered lumens | Rated input power | CRI | Weight (lb) |
|--|----------|------------------------------|------------------|-------------------|-----|-------------|
| diffused distribution<br><br>+ | 195-0898 | LED-FT-28W / 800 mA - 2700 K | 1150.2           | 31 W              | 80  | 8.00        |
|  | 195-9542 | LED-FT-28W / 800 mA - 3000 K | 1198.1           | 31 W              | 80  | 8.00        |
|  | 195-9543 | LED-FT-28W / 800 mA - 4000 K | 1250.9           | 31 W              | 80  | 8.00        |