

ETC119 LED

Inground luminaires

we-ef




Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 23/10/2024

1 of 11

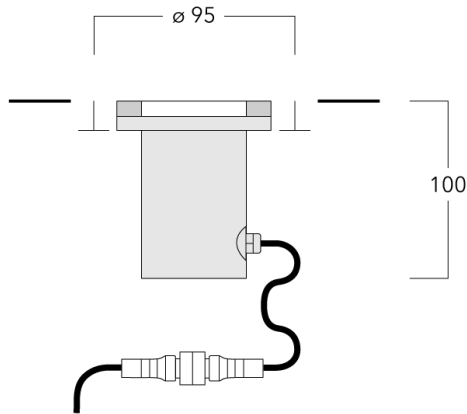**Description**


IP67. Class III. IK09. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1.5 m of flexible PVC free cable. IP68 in-line connector facilitates easy removal for off-site lamp replacement.

Factory installed LED circuit board. LED boards can be easily removed for upgrading.

Luminaire requires installation blackout. To be ordered separately.

The luminaire is not suitable for permanent underwater operation.

Specifications**Material description**

Body	Stainless steel construction
Lens	Safety glass lens; max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP67
Impact resistance	IK09

Electrical description

Driver / Ballast	Electronic converter required. To be ordered separately.
Surge protection	1/2 kV (optional SP10)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	E (Light source)

ETC119 LED

Inground luminaires

Options

Light distribution



symmetric, diffused distribution

Colour temperature



3000 K



4000 K



2700 K


Nominal Watt

1 W

ETC119 LED


Inground luminaires

Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, diffused distribution 	185-2843	LED-1/1W - 3000 K	45.9	1 W	80	1.00
	185-2844	LED-1/1W - 4000 K	50.4	1 W	75	1.00
	185-3386	LED-1/1W - 2700 K	43	1 W	80	1.00

Mounting Accessories**Installation blackout**

Description	Part ID	D1	D2	H1	Weight (kg)	D	H
Blockout, Plastic (shallow)	185-0412	95	240	110	0.50	95/240	110



Blockout, Plastic (deep)	185-0797	95	170	220	0.50	95/170	220
--------------------------	----------	----	-----	-----	------	--------	-----

**Installation cover****Fagerhult Lighting Ltd**

33-34 Dolben Street, SE1 0UQ London, United Kingdom


<https://we-ef.com/uk>

Subject to technical changes and errors. - Generated on 23/10/2024

ETC119 LED

Inground luminaires

Description	Part ID	C1
Installation cover BE	185-0414	95




C1


Electrical Accessories

Transformers

Description	Part ID	A	B	C1	C
Transformer AC 12 V/300 W	185-1550	185	105	90	105

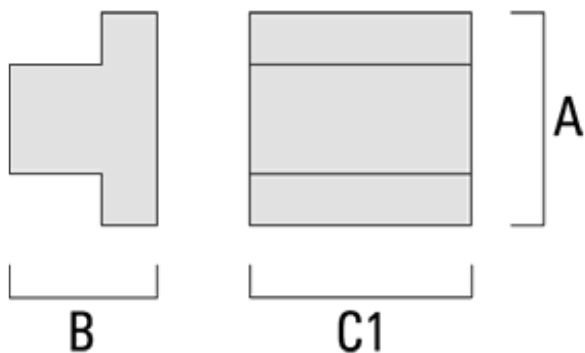


Transformer AC 12 V/20 W	185-1796	140	65	90	90
--------------------------	----------	-----	----	----	----

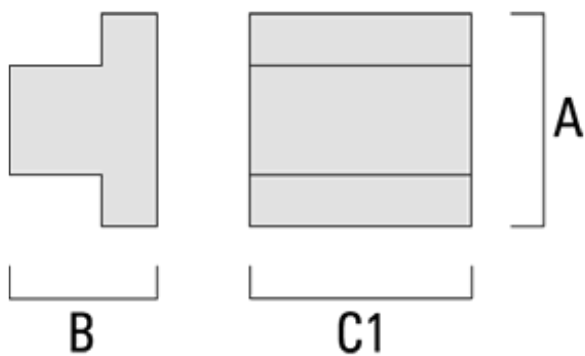


Inground luminaires

Description	Part ID	A	B	C1	C
Transformer AC 12 V/100 W	185-1797	170	80	90	100

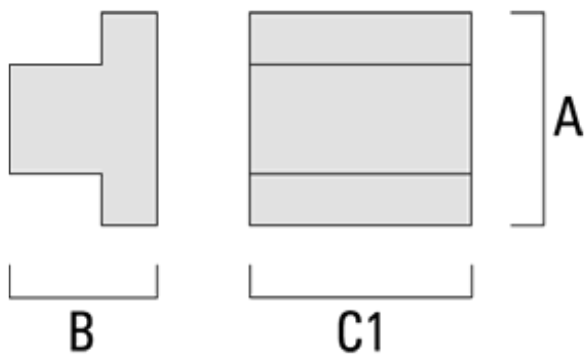


Transformer TVM-AC 24 V/20W	185-2884	140	65	90	
-----------------------------	----------	-----	----	----	--

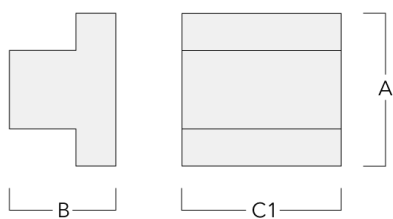


Inground luminaires

Description	Part ID	A	B	C1	C
Transformer TVM-AC 24 V/50W	185-2885	140	65	90	

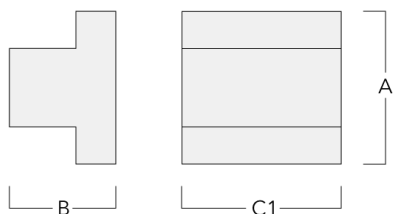

Sealable junction box

Description	Part ID	C1	M1	M2
Sealable junction box SJB130	185-1624	146	Ø 10	Ø 12 - 19

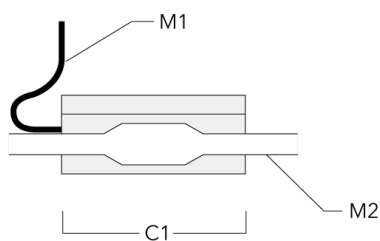

Main converter

Fagerhult Lighting Ltd


33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>


Subject to technical changes and errors. - Generated on 23/10/2024

Inground luminaires

Description	Part ID	A	B	C1
Main converter TVE-DC 24 V/12 W	400-0310	90	61	18

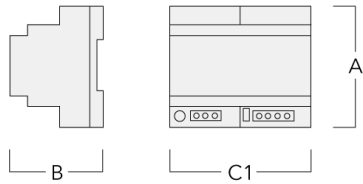

Main converter TVE-DC 24 V/60 W	400-0311	89	59	72
---------------------------------	----------	----	----	----

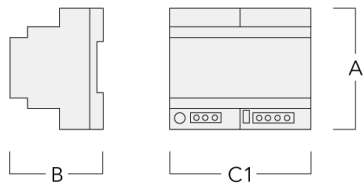

ETC119 LED
Inground luminaires

Fagerhult Lighting Ltd

33-34 Dolben Street, SE1 0UQ London, United Kingdom

<https://we-ef.com/uk>

Subject to technical changes and errors.
Generated on 23/10/2024