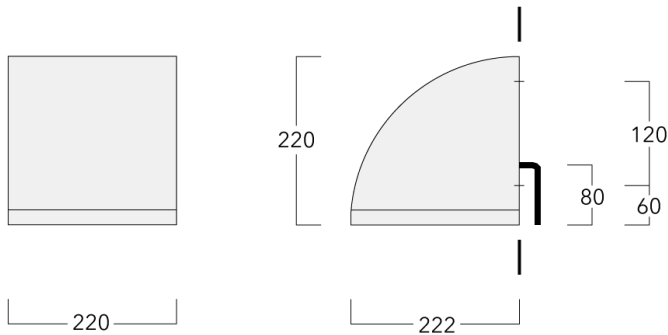


# OLV334 LED

## Wall luminaires surface mounted

**we-ef**



### Description

IP65. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007 or white RAL 9016. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries. Optional 2200 K version available. To be specified at time of ordering.

Luminaire can be mounted for up or down lighting.

IK10 on request with polycarbonate lens.

### WE-EF LIGHTING (Thailand) Co., Ltd.





57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 23/11/2024

**Wall luminaires surface mounted****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP65
Impact resistance	IK08
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

---

**Additional information**

---

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

---

# OLV334 LED

Wall luminaires surface mounted

**we-ef**

## Options

### Light distribution



asymmetric, side throw [S70]



rectangular, side throw [R65]



asymmetric, forward throw [A60]

### Colour temperature



3000 K



4000 K



2700 K




### Nominal Watt

15 W

29 W

0 W

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	132-0530	LED-12/12W / 350 mA - 3000 K	1476.3	13.9 W	80	6.60
	132-0531	LED-12/12W / 350 mA - 4000 K	1619.1	13.9 W	80	6.60
	132-0540	LED-12/24W / 700 mA - 3000 K	2630.6	27 W	80	6.60
	132-0541	LED-12/24W / 700 mA - 4000 K	2812	27 W	80	6.60
	132-0641	LED-12/12W / 350 mA - 2700 K	1381	13.9 W	80	6.60
	132-0642	LED-12/24W / 700 mA - 2700 K	2449.2	27 W	80	6.60
asymmetric, side throw [S70] 	132-0526	LED-12/12W / 350 mA - 3000 K	1549.2	13.9 W	80	6.60
	132-0527	LED-12/12W / 350 mA - 4000 K	1699.2	13.9 W	80	6.60
	132-0536	LED-12/24W / 700 mA - 3000 K	2760.6	27 W	80	6.60
	132-0537	LED-12/24W / 700 mA - 4000 K	2951	27 W	80	6.60
	132-0637	LED-12/12W / 350 mA - 2700 K	1449.3	13.9 W	80	6.60
	132-0638	LED-12/24W / 700 mA - 2700 K	2570.2	27 W	80	6.60
rectangular, side throw [R65] 	132-0528	LED-12/12W / 350 mA - 3000 K	1394.4	13.9 W	80	6.60
	132-0529	LED-12/12W / 350 mA - 4000 K	1529.4	13.9 W	80	6.60
	132-0538	LED-12/24W / 700 mA - 3000 K	2484.7	27 W	80	6.60
	132-0539	LED-12/24W / 700 mA - 4000 K	2656.1	27 W	80	6.60
	132-0639	LED-12/12W / 350 mA - 2700 K	1304.5	13.9 W	80	6.60
	132-0640	LED-12/24W / 700 mA - 2700 K	2313.3	27 W	80	6.60

# OLV334 LED

Wall luminaires surface mounted



## Control

### 1-10 V analogue dimming interface

---

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

---

**Wall luminaires surface mounted****DALI interface**

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90

## Dali 2.0

- Application controllers and Input devices defined
- Single-masters and multi-masters allowed
- Event priorities defined
- Separate addressing & grouping from control gear

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!