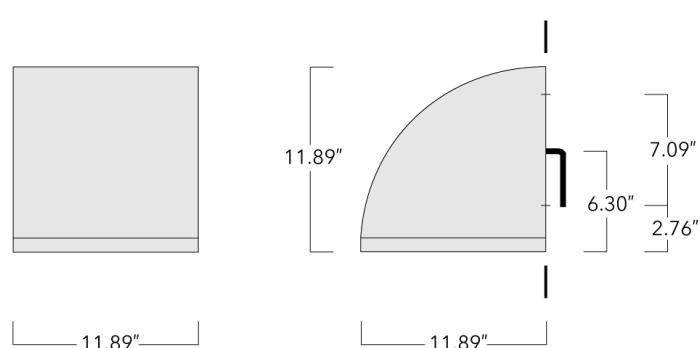


Surface Mounted Wall Luminaires

Surface Mounted Wall Luminaires

**Description**

IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming on request.

Can be mounted up or down.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Surface Mounted Wall Luminaires**Specifications****Material description**

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Tempered glass lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP65
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL listed. Suitable for wet locations.

Surface Mounted Wall Luminaires**Options****Light distribution**

symmetric, medium beam [M]



symmetric, very narrow beam, 'sharp cut-off' [VNS]

Color temperature

3000 K



4000 K



2700 K



29 W

42 W

0 W

Surface Mounted Wall Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	132-0542	LED-24/24W / 350 mA - 3000 K	3232.1	26.5 W	80	25.10
	132-0543	LED-24/24W / 350 mA - 4000 K	3544.9	26.5 W	80	25.10
	132-0552	LED-24/36W / 500 mA - 3000 K	4483.2	39 W	80	25.10
	132-0553	LED-24/36W / 500 mA - 4000 K	4796	39 W	80	25.10
	132-0643	LED-24/24W / 350 mA - 2700 K	3023.6	26.5 W	80	25.10
	132-0644	LED-24/36W / 500 mA - 2700K	4170.5	39 W	80	25.10
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	132-0544	LED-24/24W / 350 mA - 3000 K	3443.5	26.5 W	80	25.10
	132-0545	LED-24/24W / 350 mA - 4000 K	3776.7	26.5 W	80	25.10
	132-0554	LED-24/36W / 500 mA - 3000 K	4776.5	39 W	80	25.10
	132-0555	LED-24/36W / 500 mA - 4000 K	5109.7	39 W	80	25.10
	132-0645	LED-24/24W / 350 mA - 2700 K	3221.3	26.5 W	80	25.10
	132-0646	LED-24/36W / 500 mA - 2700K	4443.2	39 W	80	25.10

Surface Mounted Wall Luminaires**Electrical Accessories****Emergency Lighting Package**

Description	Part ID	Additional information
OLV34_LED Emergency Lighting Package	132-6901	Emergency battery backup operating for a minimum of 90 minutes, at full power, when main power is lost.