

# OLV344 LED

## Surface Mounted Wall Luminaires



### Description

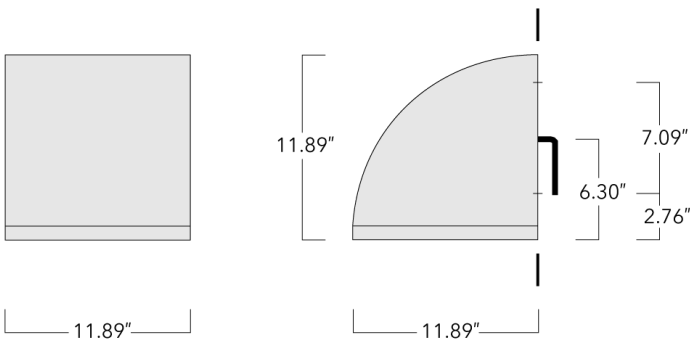
IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming on request.

Can be mounted up or down.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product, please find the spec sheet and DarkSky certificate in the library.



### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024





# OLV344 LED

## Surface Mounted Wall Luminaires

### Specifications

#### Material description

---

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Tempered glass lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP65
Impact resistance	IK07
Corrosion resistance	5CE

---

#### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

---

#### Additional information

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL listed. Suitable for wet locations.

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

# OLV344 LED

## Surface Mounted Wall Luminaires

### Options

#### Light distribution



[S70] Type II Short



[R65] Type IV Medium



[A60] Type IV Very Short

#### Color temperature



3000 K



4000 K



2700 K

#### Nominal Watt

29 W

58 W

0 W

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030




customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

# OLV344 LED

## Surface Mounted Wall Luminaires

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
[A60] Type IV Very Short 	132-0550	LED-24/24W / 350 mA - 3000 K	2952.5	26.5 W	80	25.10
	132-0551	LED-24/24W / 350 mA - 4000 K	3238.3	26.5 W	80	25.10
	132-0560	LED-24/48W / 700 mA - 3000 K	5261.2	54 W	80	25.10
	132-0561	LED-24/48W / 700 mA - 4000 K	5624	54 W	80	25.10
	132-0651	LED-24/24W / 350 mA - 2700 K	2762.1	26.5 W	80	25.10
	132-0652	LED-24/48W / 700 mA - 2700 K	4898.3	54 W	80	25.10
[R65] Type IV Medium 	132-0548	LED-24/24W / 350 mA - 3000 K	2788.8	26.5 W	80	25.10
	132-0549	LED-24/24W / 350 mA - 4000 K	3058.7	26.5 W	80	25.10
	132-0558	LED-24/48W / 700 mA - 3000 K	4969.4	54 W	80	25.10
	132-0559	LED-24/48W / 700 mA - 4000 K	5312.1	54 W	80	25.10
	132-0649	LED-24/24W / 350 mA - 2700 K	2608.9	26.5 W	80	25.10
	132-0650	LED-24/48W / 700 mA - 2700 K	4626.7	54 W	80	25.10
[S70] Type II Short 	132-0546	LED-24/24W / 350 mA - 3000 K	3098.5	26.5 W	80	25.10
	132-0547	LED-24/24W / 350 mA - 4000 K	3398.3	26.5 W	80	25.10
	132-0556	LED-24/48W / 700 mA - 3000 K	5521.2	54 W	80	25.10
	132-0557	LED-24/48W / 700 mA - 4000 K	5901.9	54 W	80	25.10
	132-0647	LED-24/24W / 350 mA - 2700 K	2898.6	26.5 W	80	25.10
	132-0648	LED-24/48W / 700 mA - 2700 K	5140.4	54 W	80	25.10

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

# OLV344 LED



## Surface Mounted Wall Luminaires

### Electrical Accessories

#### Emergency Lighting Package

Description	Part ID	Additional information
OLV34_ LED Emergency Lighting Package	132-6901	Emergency battery backup operating for a minimum of 90 minutes, at full power, when main power is lost.

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 10/23/2024

**OLV344 LED**

**Surface Mounted Wall Luminaires**

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086

Phone: +1 724 742 0030

[customersupport.usa@we-ef.com](mailto:customersupport.usa@we-ef.com)

<https://we-ef.com/us>

Subject to technical changes and errors.

Generated on 10/23/2024